

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H01M 6/18, 10/40, C08F 283/01, 290/06, C08K 3/04, C08L 67/06, 63/10	A1	(11) International Publication Number: WO 00/57506 (43) International Publication Date: 28 September 2000 (28.09.00)
(21) International Application Number: PCT/US00/06999 (22) International Filing Date: 17 March 2000 (17.03.00) (30) Priority Data: 60/125,138 19 March 1999 (19.03.99) US Not furnished 16 March 2000 (16.03.00) US (71) Applicant: PREMIX [US/US]; Rt. 20 & Harmon Road, North Kingsville, OH 44068-0281 (US). (72) Inventor: BUTLER, Kurt, I.; 4585 Gageville Monroe Road, Kingsville, OH 44048 (US). (74) Agents: TYRPAK, Michele, M. et al.; Hudak & Shunk Co., L.P.A., Suite 808, 7 West Bowery Street, Akron, OH 44308-1133 (US).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(54) Title: HIGHLY CONDUCTIVE MOLDING COMPOUNDS AND FUEL CELL BIPOLAR PLATES COMPRISING THESE COMPOUNDS (57) Abstract A conductive polymer is disclosed which is suitable for use in applications which require corrosion resistance including resistance to corrosion when subjected to acidic flow at temperature ranging from -40 to 140 degrees Fahrenheit and which can be molded into highly intricate and thin specimens which exhibit consistent conductivity, sufficient strength and flexibility, and appropriate surface characteristics. In particular the invention involves molding unsaturated prepolymer resin composition, which have high loadings of conductive fillers. Further to enable the necessary characteristics, the compositions include rheological modifiers such as Group II oxides and hydroxides; carbodiamides; aziridines; polyisocyanates; polytetrafluoroethylene (PTFE); perfluoropolyether (PFPE), and polyethylene. Ostensibly, these modifiers act to alter the apparent molecular weight and three dimensional prepolymer network structures correcting rheological deficiencies which otherwise lead to excessive resin particulate separation during the molding process and large variances in bulk conductivity across the plate surface. The composition is disclosed for use in electrochemical cells, such as fuel cells. <div style="text-align: right;">BEST AVAILABLE COPY</div>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

HIGHLY CONDUCTIVE MOLDING COMPOUNDS AND FUEL CELL BIPOLAR PLATES COMPRISING THESE COMPOUNDS

5 **THIS PATENT APPLICATION IS BASED UPON U.S. PROVISIONAL
APPLICATION SERIAL NO. 60/125,138, FILED 03/19/99**

Field of Invention

10 The field of invention is highly conductive compositions that are
particularly useful for molding processes such as those using thermosetting
bulk molding compositions. These molding compositions can be formed into
high definition complex configurations. For example, they can be molded
into thin plate-like specimens (e.g. 60 to 200 thousandths of an inch) having
an intricately patterned network of very narrow, relatively smooth, flow
15 passages. These specimens are used as electrochemical cell bipolar plates.
These plates desirably have a bulk conductivity of at least 40, 50, 60, 70, 80,
90 or even 96 S/cm. They also have desirable surface characteristics; heat,
temperature, chemical and shrink resistance; strength; and cost.

20 Background of the Invention

Conductive polymers have applications in providing alternatives to
traditional conductive materials, which often involve greater labor expenses
to manufacture into complex parts. In particular, in instances where the
25 demand justifies significant volumes of a product, polymer molding expenses
may prove far more cost effective than comparable machining expenses for
other materials. However in the past, it has proved difficult to achieve both a
high level of conductivity and desirable molding characteristics. Generally,
high level weight percentages of an appropriate filler in a polymeric matrix
30 are necessary to achieve satisfactory levels of conductivity. However, these
high load levels lead to problems with the strength, durability, and moldability
of the resulting composition.

One area in particular where it would be beneficial to solve the
previously mentioned strength, durability, and molding issues is for
35 application in fuel cells. Electrochemical fuel cells have great appeal as a
potentially limitless energy source that is clean and environmentally friendly.

These fuel cells can, in addition, be constructed at an appropriate scale for small scale energy consumption, such as household use, or for industrial scale use, and even for commercial power generation. They have portable applications to power small appliances (such as computers or camping equipment), or automobiles and other forms of transportation. Although these different applications involve differences in size, the fundamental construction remains the same for generation of power varying from less than one to a few thousand kilowatts.

Basically, a fuel cell is a galvanic cell in which the chemical energy of a fuel is converted directly into electrical energy by means of an electrochemical process. The fundamental components of the fuel cell are an electrode comprising an anode and a cathode, electrocatalysts, and an electrolyte. Work has been done in perfecting both liquid and solid electrolyte fuel cells and the present invention may find use in both types of fuel cells.

Solid electrolytes include polymeric membranes, which act as proton exchange membranes typically fueled by hydrogen. These membranes usually comprise a perfluorinated sulphonic acid polymer membrane sandwiched between two catalyzed electrodes that may utilize platinum supported on carbon as an electrocatalyst. Hydrogen fuel cells form a reaction chamber, which consumes hydrogen at the anode. At the cathode, oxygen reacts with protons and electrons at the electrocatalytic sites yielding water as the reaction product. A three-phase interface is formed in the region of the electrode and a delicate balance must be maintained between the electrode, the electrolyte, and the gaseous phases.

Systems involving the use of other electrolytes have also been studied. These would include alkaline fuel cells, phosphoric acid fuel cell, molten carbonate fuel cells, and solid oxide fuel cells. However, the principles are similar, as are some of the issues in perfecting these products.

A fuel cell reactor may comprise a single-cell or a multi-cell stack. In any case, the cell includes at least two highly conductive flow field plates that serve multiple functions. These plates may function as current collectors that provide electrical continuity between the fuel cell voltage terminals and electrodes. They also provide mechanical support (for example for the

membrane/electrode assembly). In addition, these plates act to transport reactants to the electrodes and are essential to establishing the previously mentioned delicate phase balance.

Typically, the fuel cell plates are thin relatively flat plate members that include a highly complex network of interconnecting channels that form the flow field area of the plate. The configuration of these channels is highly developed in order to maintain the proper flow of reactants and to avoid channeling or the formation of stagnant areas, which results in poor fuel cell performance. It is critical that the flow of the reactants is properly managed, and that the electrocatalysts are continuously supplied with precisely the appropriate balance of reactants. Thus, it is essential for the plates to define and maintain clear passages within the highly engineered flow labyrinth. Moreover, in order to assure a satisfactory life, the plates must be able to resist surface corrosion under a variety of conditions. For example, fuel cells may be placed outside and subject to ambient weather. Thus, the cells must be resistant to stress cracking and corrosion at temperatures ranging from – 40 to 200 degrees Fahrenheit. Further, since the conditions within the cell are corrosive, the cells must also be resistant to chemical attack at these temperatures from various corrosive substances. For example, the plates may be subjected to de-ionized water, methanol, formic acid, formaldehyde, heavy naptha, hydrofluoric acid, terafluoroethylene, and hexafluoropropylene depending on the fuel cell type. Moreover, the conditions within the fuel cell may lead to elevated temperatures, i.e. from 150 to 200 degrees Fahrenheit, as well as elevated pressures, i.e. from ambient to 30 p.s.i. Corrosive decomposition needs to be avoided since it almost certainly would cause a system failure by changing the flow patterns within the fuel cell.

Past attempts at solving the various requirements for fuel cell plates have included the use of metal and machined graphite plates. The use of metal plates result in higher weight per cell, higher machining costs and possibly corrosion problems. Machined graphite plates solve the weight and corrosion problems but involve high machining cost and result in fragile products, especially when prepared as very thin plates. Some use of

graphite/poly(vinylidene fluoride) plates has been made but these have been characterized as being expensive and brittle and having long cycle times.

U.S. Patent No. 4,197,178 is incorporated herein for its teaching of the working and compositions of electrochemical cells. U.S. Patent No. 4,301,222 is incorporated herein for its teachings on graphite based separators for electrochemical cells.

Summary of the Invention

In the past, known conventional bulk molding compounds have been modified to be conductive by the addition of large amounts of conductive filler, such as graphite. During molding it was observed that the liquid resin phase separated from the filler and was exuded from the molding. Further, it was observed that this occurrence tended to cause cracking in molded specimens that were thin. Moreover, bulk conductivity measurements at different locations within the specimen were inconsistent. In accordance with the present invention, it was discovered that compositions could be formulated which solved the foregoing issues. In particular, the formulations involve the use of a resin matrix with high loadings of a conductive filler; various additional additives, such as initiators, mold-release agents, and carbon black; and one or more rheological agents selected from the group comprising group II oxides, alkaline earth oxides, carbodiamides, polyisocyanates, polyethylene and polytetraethylene fluorethylene. One possible explanation for the mechanism by which the molding agents work, is that they act to build the apparent molecular weight of the prepolymer (e.g. vinyl ester resin or unsaturated polyester resin). Alternatively, these agents may promote flow such as by reducing shear during molding. The use of these rheological agents eliminates phase separation, as well as cracking and inconsistent conductivity measurements. It is anticipated that these problems are a result of the complex configuration of the specimens being molded along with the very high concentrations of conductive filler.

In addition to solving molding and cracking problems it is anticipated that other properties such as the coefficient of thermal expansion, electrical and thermal conductivity, shrink resistance and mechanical properties may be more uniform and/or otherwise improved as a result of the use of the present invention. In addition to the foregoing improvements it was found

that a resin composition of the invention demonstrated a higher glass transition temperature and resulted in an improvement in the hot strength of the molded part. Further improvements are also possible by optimizing both gel time and cure time for the prepolymer by controlling initiator type and amount and inhibitor type and amount.

The foregoing improvements in specimens molded from these compositions enable the low cost mass production of bipolar plates as an additional embodiment of the invention. These could be used for portable fuel cells, as well as stationary power units.

Brief Description of the Drawings

Figure 1 is an illustration of a fuel cell assembly utilizing a bipolar cell plate; and

Figure 2 is an illustration of a bipolar fuel cell plate that can be made in accordance with the present invention.

Detailed Description of the Invention

The invention relates to improvements in conductive molding compositions. In particular, the compositions can be used in compression molding processes and in injection molding processes. Further these compositions enable the production of thin and intricate specimens that have high concentrations of conductive filler.

Sheet molding and bulk molding compositions are described in U.S. Patents 5,998,510; 5,342,554; 5,854,317; 5,744,816; and 5,268,400; all of which are hereby incorporated by reference for their teachings on the various modifications to molding compositions that are known to the art.

One component of a molding resin composition is a crosslinkable prepolymer such as an unsaturated polyester resin or vinyl ester resin. Desirably the prepolymer has a relatively low molecular weight such as from about 200 to about 5000 (weight average). They are described in detail

with examples in the above patents incorporated by reference. The polyester resins are the condensation product derived from the condensation of unsaturated polybasic acids and/or anhydrides with polyols such as dihydroxy or trihydroxy compounds. Desirably, these polyester resins are the esterification reaction product of diacids, or anhydrides of diacids, generally having from about 3 to about 12, or more preferably from about 4 to about 8 carbon atoms, with a polyol or a cyclic ether having from about 2 to about 12, or more preferably from about 2 to about 6 carbon atoms.

In general, the vinyl ester resins that can be used are the reaction products of epoxy resins and a monofunctional ethlenically unsaturated carboxylic acid. More specifically, these vinyl ester resins are the reaction product of an epoxy terminated oligomer, for example, an epoxy functionalized bisphenol A with an acrylic acid, or methacrylic acid forming acrylic terminal groups on the oligomer. The vinyl esters have predominantly terminal unsaturation while the unsaturated polyesters have predominantly internal unsaturation.

Another component of the molding composition is one or more unsaturated monomers that are copolymerizable with the resin. Desirably, this component is capable of dissolving the resin component at room temperature. Thus, in one embodiment the resin is dissolved in the monomeric component prior to being combined with the remaining components. Examples of suitable monomers are styrene, alpha-methyl styrene, chloro-styrene, vinyl toluene, divinyl benzene, diallylphthalate, methyl methacrylate, and mixture of these, with preferred monomers being styrene and methyl methacrylate. The ratio of monomer(s) to resin is desirably from about 40:60 to about 75:25 and preferably from about 40:60 to about 65:35 by weight.

Another component to the molding composition is fillers. In accordance with the invention the predominant filler is a conductive filler in order to impart electrical conductivity of the final molded product. A preferred filler is graphite particles, in particular, a synthetic crystalline graphite particle, such as currently supplied by Asbury Graphite in Asbury, New Jersey under the designation Asbury 4012. This graphite is characterized as having less than 10% particles greater than 150 microns

and less than 10% smaller than 44 microns in diameter. Other graphite fillers include: Ashbury A99, Ashbury 3243, Ashbury modified 4012, Ashbury 3285, Ashbury 230U; TimrexR KS 75 and 150, and TimrexR KC 44, all sold by TIMCAL of Westlake, Ohio; and Calgraph Sold by SGL Technic Inc of Valencia, California. This filler is used at a loading of at least 50% by weight. Other conductive fillers such as other forms of graphite (including graphite pitch-based fibers), metal particles, or metal coat particles may be used in conjunction with the graphite filler, or even alone. Desirably conductive fillers are at least about 50, about 60, or about 65 weight percent of the molding composition. More desirably the filler is more than about 70 or 71 percent to about 78 weight percent of the molding composition. Alternatively this amount can be expressed as at least about 250 phr, more preferably at least about 275, or even 300 phr. Alternatively stated the conductive fillers are present in an effective amount to result in a bulk conductivity of at least about 40, about 50, about 60, about 70, about 80, about 85, about 90 or about 96 S/cm when measured in accordance with ASTM Test Standard No. F1529-97 for a molded article having a thickness from about 0.060 to about 0.200 inches. Current technology in fuel cell plates uses a bulk conductivity of at least about 55, and preferably at least about 70.

An initiator is another component of the molding composition. The initiator initiates the copolymerization of the resin and the monomer(s). Initiators include any free radical initiator capable of forming radicals in the correct concentration under the molding conditions. They may include peroxides, hydroperoxides, redox systems, diazo compounds, persulfates, perbenzoates etc. The initiators are typically used in amounts of about 0.05 to about 5 weight percent, and more preferably about 0.1 to about 2 weight percent. Alternatively, these amounts can be expressed in parts per hundred parts by weight of resin, i.e. from about 0.5 to about 4.0 phr, preferably from about 0.7 to about 3.0 phr, and most preferably from about 0.8 to about 2.25 phr. Alternatively high temperature initiators such as Di-cup, e.g. dicumyl peroxide can be used for molding applications where higher initiation temperatures are desirable.

An essential component to the improved molding composition is a rheological modifier, which may act to increase the molecular weight such as by chain extension of the resin prepolymer. Suitable modifiers include Group II oxides and hydroxides, such as calcium or magnesium oxide; carbodiamides; aziridines; and polyisocyanates. It is believed that the foregoing modifiers act chemically by co-reacting into the polymer backbone at carboxy or hydroxy sites. Other suitable modifiers include polytetrafluoroethylene (PTFE); perfluoropolyether (PFPE), and polyethylene. These modifiers may act to reduce shear and thus promote flow in the composition during molding. Fumed silica is an example of a substance, which may act mechanically to increase molding viscosity and therefore be a suitable rheological modifier for this invention. Combinations of two or more rheological modifiers may be desirable for optimum properties. In this application they are used to modify the resin structure to prevent phase separation of the resin from the conductive filler (in particular in view of the high loadings of the conductive filler, i.e. over 50% or even 65% by weight or more of graphite). The modifiers are further used in general to enable the achievement of a high definition conductive polymeric fuel cell plate.

Desirably the rheological modifiers are used in an effective amount to prevent phase separation during molding. For the purpose of this application molding will desirably be at pressures from about 400 to about 5000 psi, and preferably from about 2000 to about 3500 psi, and most preferably from about 2500 to about 3000 psi.. Desirable amounts of group II oxides (including group II hydroxides and mixtures of these compounds) is from about 0.1 to about 1 or about 2 weight percent, more desirably from about 0.2 or about 0.3 to about 0.7 or about 0.8 weight percent. This can also be expressed as from about 0.5 to about 4.0 phr, preferably from about 1.0 to about 3.0 phr, and most preferably from about 1.5 to about 2.5 phr. Specific preferred compounds include magnesium oxide, or magnesium hydroxide or calcium oxide. Examples of a suitable magnesium oxide additive is 99% pure magnesium oxide sold under the tradename "Elastomag" from Morton Thiokol, Inc. in Danvers, MA. Other examples include a magnesium oxide dispersion sold under the tradename "pg-9033"

by Plasticolors, and a magnesium hydroxide dispersion also sold by Plasticolors under the tradename "pg-91146". Another suitable magnesium hydroxide is Barcroft, which is a powdered version. Examples of aziridine compounds include polyfunctional aziridines supplied by EIT, Inc. under the trade designation XAMA, including XAMA-2, which is identified as trimethylol propane-tris (beta-(N-aziridiny) propionate), and, in particular, XAMA-7, which is identified as pentaerythritol-tris-(beta-(aziridiny) propionate); a product of Sybron Chemicals, under the tradeneme Ionac including PFAZ-322, identified as a trifunctional aziridine; and including CX-100, a product of Zeneca Resins, identified as a polyfunctional aziridine. Desirable amounts of aziridine and/or polyisocyanate modifiers is from about 1 to about 10 or about 15 weight percent, and more desirably from about 2 or about 3 to about 8 or about 9 weight percent. This can also be expressed as from about 0.5 to about 20 phr, preferably from about 1 to about 17 phr, and most preferably from about 2 to about 15 phr. Polyisocyanates in general are described in more detail in U.S. 5,268,400 column 6, line 59 through column 7, line 17. A specific diisocyanate, which can be used is diphenylmethane diisocyanate such as that sold by ICI Americas of West Deptford, New Jersey, under the tradename "Rubinate" R MF-1780. Additionally, a suitable diisocyanate is Lupranate MP102, solvent free urethane-modified diphenylmethane diisocyanate from BASF. Desirable amounts of polytetrafluoroethylene (PTFE) (and/or perfluoropolyether (PFPE)) is from about 0.5 to about 1 or about 2 weight percent, more desirably from about 0.6 or about 0.7 to about 1.8 or about 1.3 weight percent. This can also be expressed as from about 0.5 to about 20 phr, preferably from about 3 to about 15 phr, and most preferably from about 5 to about 12 phr. A suitable fine particle PTFE powder (having an average particle size by Coulter Counter of less than ____ microns) is sold under the tradename "Marzon #5" by Marshall Products Company of West Chester Pennsylvania. It is preferable to use a linear low-density polyethylene such as sold by Equistar of Houston Texas under the tradename FN 510. It is preferable to use it in amounts of from about 3 to about 20 phr, more preferably from about 4 to about 17, and most preferably from about 5 to about 15 phr. Fumed silica

could be used at from about 0.5 to about 20 phr, preferably from about 1 to 10 phr.

5 Other optional components to a molding composition include urethane based or urethane containing oligomers or polymers, low shrinkage additives like polyvinyl acetate or polyethylene; fibrous reinforcing agents such as cotton glass microfibers or graphite microfibers; flexibilizing agents; mold release agents; polymerization inhibitors to inhibit premature polymerization during storage or the initial stages of molding; viscosity modifiers like fumed silica; and mold lubricant like stearates of calcium, zinc or magnesium.

10 Carbon black may be added to influence the surface conductivity and to change the appearance of the molded product. Suitable carbon blacks include an electrically conductive low residue carbon black having a nitrogen surface area m²/g of 270, a STSA surface Area m²/g of 145 a sieve residue at 35 mesh of 0ppm and at 325 mesh of 20 ppm as sold under the

15 tradename Conductex 975 by Columbia Chemicals of Jamesburg, NJ. Also, suitable conductive carbon black is supplied by Akzo Nobel Chemicals of Chicago, Illinois under the tradename Ketjenblack EC-300 J and EC-600JD. Cabot Corporation of Boston MA also supplies a conductive carbon black. It is noted that polyethylene and fumed silica can function as the rheological

20 modifier in addition to the foregoing functions.

The molding compositions may be formulated and mixed using a variety of mixing conditions including either continuous or batch and using a variety of known mixing equipment. Specific examples are set forth in the example section. The compositions may be advantageously stored for

25 reasonable times before molding. The compositions can be molded by a variety of methods including compression molding and injection molding. The compositions can be molded under typical conditions for these types of molding including at pressures from about 400 to about 5000 psi, and preferably from about 2000 to about 3500 psi, and most preferably from

30 about 2500 to about 3000 psi and temperatures at from about 225 to about 400 degrees Fahrenheit. Dwell times are from about 70 seconds to about four minutes. The compositions are useful for molding complex configurations including thin or intricate conductive articles such as those having a thickness from about 0.050 to about 0.200 inches, and more

preferably from about 0.060 to about 0.150 inches. The compositions are useful for articles having bulk conductivity of at least 40, 50, 60, 70, 80, 85, 90 or even 96 S/cm at a thickness given above. The articles from the composition desirably have tensile strength from about 1500 to about 5000 psi as measured in accordance with ASTM test No.D638 and flexural modulus from about 2500 to about 10,000 psi when tested in accordance with ASTM test no.D790.

Molded products made from the compositions of the present invention are useful for a variety of applications demanding complex configurations, conductivity, as well as strength, and corrosion resistance. One particularly advantageous product which can be made by compression molding is a bipolar plate for use in fuel cells. An example of such a plate is shown in Figure 1. The drawing of this plate is intended to illustrate the molding capabilities of the conductive compound of the present invention. It is not necessarily intended to provide optimal, or even operative, field flow design. It should not limit the invention in any way. The plate 10 includes a fluid flow face with one or more generally parallel and or serpentine flow channels 12. The flow channels receive and transmit fluids through ports 14 and 16 which are in fluid communication with corresponding entry and exit fluid manifolds 18 and 19. The plate has a dimension which will vary from 1 to 20 inches in length and width, and having a thickness of 0.02 to 0.3 inch, with a cross-sectional depth of the flow channel in the range of about 0.005 to 0.080 inch. The cross-sectional width of a land separating adjacent flow channel sections is in the range of 0.01 to 0.1 inch. The plate may include a number of peripheral through holes 20 that act as a manifold for fuel transportation.

Figure 2 illustrates the unassembled components of a fuel cell. This fuel cell has a base unit 12 which includes debossed means to accept a reformer 14 and a fuel cell stack 16 which is comprised of a plurality of bipolar plates 20 which are sandwiched between a stack cap 22 and a stack base 24. The fuel cell further includes a heat exchanger 26. An enclosure 30 provides a leak-proof housing for the unit.

Examples

The following examples use the components set forth below.

Resin A is Hetron 922 available from Ashland Chemical Co. in Columbus, Ohio. It is a low viscosity epoxy vinyl ester resin. It is about 55 wt.% solids and about 45 wt.% reactive monomer.

5 Resin B is Atlac 382ES from Reichhold Chemicals, Inc. in Research Triangle Park, NC. It is characterized as a bisphenol fumarate resin. It was diluted to about 55 wt.% solids with styrene.

Resin C is Dion 6694 diluted to 55 wt.% solids in styrene. It is available from Reichhold Chemicals, Inc. It is characterized as a modified bisphenol fumarate polyester.

10 Resin D is 42-2641 from Cook Composites and Polymers in Kansas City, MO. It was diluted to 55 wt.% solids with styrene. It is characterized as an unsaturated polyester resin.

15 Resin E is ATLAC 3581-61 from Reichhold Chemicals, Inc. It is characterized as a vinyl ester resin at 19wt%, polyester at 27 wt% and urethane polymer at 4 wt % combined with 50wt% styrene. Thus, it was diluted to 50 wt% solids with styrene.

Resin F is 580-05 from Reichhold Chemicals, Inc. It is characterized as a urethane-modified vinyl ester resin. It was diluted to 54 wt% solids with styrene.

20 Resin G is 9100 from Reichhold Chemicals, Inc. It is characterized as a bisphenol-epoxy vinyl ester. It was diluted to 54-58 wt% solids with styrene.

25 Resin H is Dow Derakane R8084 from Dow Chemicals, Inc. It is characterized as an elastomer-modified vinyl ester resin. It was diluted to 50-60 wt% solids with styrene.

Resin I is 9480-00 from Reichhold Chemicals, Inc. It is characterized as an epoxy novolac vinyl ester. It was diluted to 53.5 wt% solids with styrene.

30 Resin J is Atlac 31-632 from Reichhold Chemicals, Inc. It is an unsaturated isocyanurate vinyl ester resin.

Rheological Modifier A is Elastomag from Morton Thiokol, Inc. in Danvers, MA. It is characterized as 99% pure magnesium oxide.

Rheological Modifier B is a polyisocyanate. The material used in these experiments is 40-7263 from Cook Composites and Polymers. It is

characterized by a NCO content of 17.7 to 20.9, a viscosity of 110-170, a flash point of 87 °F, and a crystallization point of 40 °F.

Rheological Modifier C is RCI RD THL55 (also known as RD-1070) from Reichhold, Inc. It is specifically a polyurethane resin.

5 Rheological Modifier D is Rubinate 1780 available from ICI. It is characterized as a polymeric methylene diphenyl diisocyanate.

Rheological Modifier E is Marzon #5 from Marshall Products Company of West Chester, PA. It is characterized as a finely divided powder polytetrafluorethylene.

10 Rheological Modifier F is FN-510, a linear low density polyethylene

Initiator A is Vazo (2,2-azo bisisobutyronitrile) available from Dupont , I & B Industrial and Biochemical Dept, Wilmington DE.

Initiator B is tert-butyl peroxy isopropyl carbonate (Triginox BPIC) available from Durr Marketing in Pittsburgh, PA.

15 Initiator C is t-butylperbenzoate (TBPB) available from Durr Marketing.

Initiator D is 1,3 di-t-butyl peroxy-3,5,5 trimethylcyclohexane catalyst (Trig 29B75) available from Durr Marketing.

The mold release agent is calcium stearate.

20 Graphite A is a synthetic, crystalline graphite available from Asbury Graphite in Asbury, NJ. It is characterized by having less than 10% greater than 150 microns and less than 10% smaller than 44 microns in diameter. It is available under the designation 4012.

Graphite B is a very fine conductive particulate graphite available from SGL Technic of Valencia, California under the trade designation SGL 02.

25 Graphite C is a conductive particulate graphite available from SGL Technic of Valencia California under the trade designation SGLVFINE.

Graphite D is available from Asbury Graphite in Asbury, NJ. It is a modified version of the 4012 product.

30 Graphite E is a conductive flake graphite available from Asbury Graphite in Asbury, NJ. under the trade designation 3243. It is characterized by having less than 18% greater than 75 microns and less than 65% smaller than 44 microns in diameter.

Graphite F is a conductive flake graphite available from Asbury Graphite in Asbury, NJ. under the trade designation 230U. It is characterized by having 100% smaller than 44 microns in diameter.

5 Graphite G is a synthetic graphite available from Asbury Graphite in Asbury, NJ under the trade designation A99. It is characterized by having less than 3% greater than 44 microns and less than 99 % smaller than 44 microns in diameter.

10 Graphite H is a synthetic graphite available under the designation KS 75, from Timrex America, Inc. It is characterized by having less than 95% greater than 96 microns and less than 95% smaller than 75 microns in diameter.

15 Graphite I is a synthetic graphite available under the designation KS 150, from Timrex America, Inc. It is characterized by having at least 95% less than 180 microns in diameter.

Graphite J is a synthetic graphite available under the designation KC44, from Timrex America, Inc. It is characterized by having at least 90% less than 48 microns in diameter.

20 Carbon Black B is characterized as an electrically conductive low residue carbon black having a nitrogen surface area m²/g of 270, a STSA surface Area m²/g of 145 a sieve residue at 35 mesh of 0ppm and at 325 mesh of 20 ppm as sold under the tradename Conductex 975 by Columbia Chemicals of Jamesburg, NJ.

25 Carbon Black C is conductive carbon black supplied by Cabot Corporation of Boston, MA under the tradename, Black Pearls, while Graphite D is supplied by this company under the designation XC-72.

30 Carbon Black E is conductive carbon black supplied by Akzo Nobel Chemicals of Chicago, Illinois under the tradename Ketjenblack EC-300 J and EC-600JD. EC-300 J has an iodine absorption of 740-840 mg/g; a pore volume of 310-345 cm³/100g and an apparent bulk density of 125-145 kg/m³. EC-600 JD has an iodine absorption of 1000-1150 mg/g; a pore volume of 480-510 cm³/100g and an apparent bulk density of 100-120 kg/m³.

The Glass fibers were from Owens-Corning Fiberglass and are characterized as continuous glass filaments hammermilled into a specific length used as a reinforcing and filler medium.

The inhibitor was 2,6-di-tertbutyl-p-cresol (25% in vinyl toluene).

5 The molding compositions are generally prepared by adding the resin, monomer initiator, inhibitor, mold release agent, and rheological modifier (if present) to a high shear cowels disperser and blending for 2 minutes. The
10 conductive filler is added to the mix in a Baker Perkin Mixer and mixed 15 minutes. When mixing is complete the composition is put in a suitable
15 barrier bag and allowed to mature for approximately one day before molding.

 The molding parameters for the molding compositions are as follows:
Molding temperature for plaques was 295 °F with a molding time of 3
minutes and a charge weight of 173 g. The molding temperature for
prototype bipolar plates was 290 °F with a molding time of 3 minutes and a
15 charge weight of 300 g. It was observed that the use of specific
thermosetting resins with a conductive filler in combination with various
rheological additives (thickeners) improved the bipolar plate composition in
regards to having a product which can be used in mass production of
electrochemical, e.g. fuel, cell bipolar plates.

20 The results of the formulation changes include non-cracking molding compound, better hot strength out of the mold, lower production costs, shorter cycle times, better overall electrical conductivity, increased mechanical properties, and better rheological characteristics.

 In Table IA the Control L-23012 suffered from cracking during molding
25 of a plate and had non-uniform conductivity and resistivity along the surface of the plate due to phase separation of the conductive filler and resin during molding. Samples L-23185, L-23120, L-23119 and L-23126 had desirable properties.

 In Table IB Samples L-23125, L-23186, L-23039 had desirable
30 properties. Samples L-23184 and L-23022 had lower than optimal bulk conductivity and higher than optimal resistivity.

In Table IC Samples L-23023, L-23063, L-23024, L-323027, and L-23026 had lower than optimal bulk conductivity and higher than optimal resistivity.

- 5 In Table ID Samples L-23209 and L-23215 had good properties. Samples L-23028, L-23210, and L-23211 had lower than optimal bulk conductivity and higher than optimal resistivity.

Table IA

Component	Control L-23012	L-23185	L-23120	L-23119	L-23126
Resin A	30.1g				
Resin B					
Resin C				19.95g	
Resin D		17.13	15.63		23.33
Initiator	0.6g (A)	0.4 (B)	0.4 (B)	0.4 (B)	0.4 (B)
Inhibitor	0.1	0.1	0.1	0.1	0.1
Mold Release	1.2	1.2	1.2	1.2	1.2
Graphite A	68g	75	78	78	
Graphite B					68
Graphite C					
Modifier A	-			0.35g	
Modifier B	-	6.17	4.67		6.97
Glass fibers					
Bulk Conductivity S/cm	85	85	90	90	70
Areal Conductivity S/cm ²	300	260	260	260	220
Tensile psi	3500	3700	3600	3100	3500
Flexural psi	4100	5500	4300	3500	4200
Resistivity OHMS/M ²		70.9	87.51	71.2	37.7

Table IB

Component	L-23125	L-23186	L-23039	L-23184	L-23022
Resin A					
Resin B			19.95		29.95
Resin C		22.65		27.65	
Resin D	23.33g				
Initiator	04 (B)	0.4 (C)	0.4 (B)	0.4 (C)	0.4 (B)
Inhibitor	0.1	0.1	0.1	0.1	0.1
Mold Release	1.2	1.3	1.2	1.3	1.2
Graphite A	34	70	68	70	68
Graphite B	34				
Graphite C					
Modifier A		0.55	0.35	0.55	0.35
Modifier B	6.97				
Glass fibers		5	10		
Bulk Conductivity S/cm	70	70	65	45	40
Areal Conductivity S/cm ²	210	210	200	140	140
Tensile psi	3400	3000	2800	3000	4100
Flexural psi	4200	3700	3800	4000	5000
Resistivity OHMS/M ²	58.13	123.8	117.6	155.6	222.1

Table IC

Component	L-23023	L-23063	L-23024	L-23027	L-23026
Resin A					
Resin B	29.95	29.95	29.95		
Resin C				29.95	29.950
Resin D					
Initiator	0.4 (C)	0.4 (B)	0.4 (D)	0.4 (C)	0.4 (B)
Inhibitor	0.1	0.1	0.1	0.1	0.1
Mold Release	1.2	1.2	1.2	1.2	1.2
Graphite A	68	68	68	68	68
Graphite B					
Graphite C					
Modifier A	0.35	0.35	0.35	0.35	0.35
Modifier B					
Glass fibers					
Bulk Conductivity S/cm	40	40	35	30	30
Areal Conductivity S/cm ²	140	120	130	90	90
Tensile psi	4200	3500	3100	4700	4300
Flexural psi	4900	4200	3400	6000	5300
Resistivity OHMS/M ²	205.9	-	181.7	320.9	246.8

Table 1D

Component	L-23028	L-23209	L-23210	L-23211	L-23215
Resin A					
Resin B					
Resin C	29.95			28.65	22.65
Resin D		21.49	21.49		
Initiator	0.4 (D)	0.4(B)	0.4 (B0)	0.4 (B)	0.4 (B)
Inhibitor	0.1	0.1	0.1	0.1	0.1
Mold Release	1.2	1.2	1.2	1.3	1.3
Graphite A	68	42	42	43	70
Graphite B		26			
Graphite C	0.35		26	26	
Modifier A	0.35			0.55	0.55
Modifier B		8.81	8.81		
Glass fibers					
Bulk Conductivity S/cm	30	77	25	45	79
Areal Conductivity S/cm ²	100	227	74	132	233
Tensile psi	3800	2700	3900	3000	2600
Flexural psi	5100	3900	5500	4500	4300
Resistivity OHMS/M ²	220.9	62.02	377.8	186.46	102.74

-21-

Table 2A

Component	23012	23039	23022	23023	23063
Resin A	100				
Resin B		100	100	100	100
Initiator A	1.99				
Initiator B		2.01	1.34		1.34
Initiator C				1.34	
Inhibitor	0.33	0.50	0.33	0.33	0.33
Release Agent	3.99	6.02	4.01	4.01	4.01
Graphite A	225.91	340.85	227.05	227.05	227.05
Modifier A			1.17	1.17	1.17
Fiber A		50.13			
Bulk Conductivity S/cm	85	65	40	40	40
Areal Conductivity S/cm ²	300	200	140	140	120
Tensile psi	3500	2800	4100	4200	3500
Flexural psi	4100	3800	5000	4900	4200

5

10

15

Table 2B

Component	23024	23119	23186	23184	23027
Resin B	100				
Resin C		100	100	100	100
Initiator B		2.01			
Initiator C			1.77	1.45	1.34
Initiator D	1.34				
Inhibitor	0.33	0.50	0.44	0.36	0.33
Release Agent	4.01	6.02	5.74	4.70	4.01
Graphite A	227.05	390.98	309.05	253.16	227.05
Modifier A	1.17	1.75	2.43	1.99	1.17
Fibers A			22.08		
Bulk Conductivity S/cm	35	90	70	45	30
Areal Conductivity S/cm ²	130	260	210	140	90
Tensile psi	135	260	210	140	90
Flexural psi	3100	3100	3000	3000	4700

Table 2C

Component	23026	23028	23211	23215	23185
Resin C	100	100	100	100	
Resin D					100
Initiator B	1.34		1.40	1.77	2.34
Initiator D		1.34			
Inhibitor	0.33	0.33	0.35	0.44	0.58
Release Agent	4.01	4.01	4.54	5.74	7.01
Graphite A	227.05	227.05	150.09	309.05	437.83
Graphite C			90.75		
Modifier A	1.17	1.17	1.92	2.43	
Modifier B					36.02
Fiber B				22.08	
Bulk Conductivity S/cm	30	30	45	79	85
Areal Conductivity S/cm ²	90	100	132	233	260
Tensile psi	4300	3800	3000	2600	3700
Flexural psi	5300	5100	4500	4300	5500

Table 2D

Component	23120	23126	23125	23209	23210
Resin D	100	100	100	100	100
Initiator B	2.56	1.71	1.71	1.86	1.86
Inhibitor	0.64	0.43	0.43	0.43	0.47
Release Agent	7.68	5.14	5.14	5.58	5.58
Graphite A	499.04		145.74	195.44	195.44
Graphite B		291.47	145.74	120.99	
Graphite C					120.99
Modifier B	29.88	29.88	29.88	41.00	41.00
Bulk Conductivity S/cm	90	70	70	77	25
Areal Conductivity S/cm ²	260	220	210	227	74
Tensile psi	3600	3500	3400	2700	3900
Flexural psi	4300	4200	4200	3900	5500

-25-

Table 3A

Component	23227	23236	23237	23274	23275
Resin D	100	100	100	100	100
Initiator B	1.56	1.44	1.51	2.34	2.34
Inhibitor	0.52	0.48	0.50	0.58	0.58
Release Agent	6.24	5.77	6.06	7.01	7.01
Graphite A	390.02	350.96	368.50	420.32	420.32
Carbon A				17.51	
Modifier B	21.68	22.12	28.22	36.02	36.02
Fiber C					11.68
Bulk Conductivity S/cm	90				
Tensile psi	2672				
Flexural psi	6543				
Density g/cm ³		1.67	1.75	1.77	
Shrink mils/in		-1.5	-1.83	-2.25	

5

10

15

20

Table 3B

Component	23292	23293	23343	23344	23345
Resin D	100	100	100	100	100
Initiator B	1.48	1.56	1.44	1.29	1.20
Inhibitor	0.49	0.52	0.48	0.43	0.40
Release Agent	5.93	6.24	5.75	5.14	4.80
Graphite A	370.74	395.22	349.78	299.91	272.22
Modifier B	15.67	16.48	21.71	21.68	21.70
Bulk Conductivity S/cm				72.5	58
Tensile psi		2170	2547	2448	2679
Flexural psi		4616	6503	5423	5897
Density g/cm ³	1.67	1.73	1.71		
Shrink mils/in	-2.17	-2.08	-2		

Table 3C

Component	23346	23347	23348	23349	23350
Resin D	100	100	100	100	100
Initiator B	1.09	1.03	0.95	0.90	0.84
Inhibitor	0.36	0.34	0.32	0.30	0.28
Release Agent	4.37	4.13	3.80	3.61	3.36
Graphite A	236.79	216.57	190.11	174.70	154.19
Modifier B	21.68	21.69	21.67	21.69	21.67
Tensile psi	3083	3053	2923	3107	3470
Flexural psi	5715	5766	5666	5398	5378
Density g/cm ³	1.75	1.71	1.73	1.7	1.64
Shrink mils/in	-3	-3.5	-3.33	-4	-5

Table 3D

Component	23351	23352	23360	23361	23362
Resin D	100	100	100	100	100
Initiator B	0.80	0.75	2.27	2.21	2.14
Inhibitor	0.27	0.25	0.57	0.55	0.54
Release Agent	3.22	3.02	6.81	6.62	6.43
Graphite A	142.05	125.75	425.41	413.45	402.14
Modifier B	21.68	21.73	32.16	28.45	24.93
Bulk Conductivity S/cm					85.5
Tensile psi	2787	2629			2155
Flexural psi	6167	5998			6017
Density g/cm ³	1.72	1.71	1.65	1.73	1.68
Shrink mils/in	-1.67	-1.83	-1.42	-1.42	-0.67

5

10

15

20

-28-

Table 4A

Component	23364	23365	23366	23367	23368
Resin D	100	100	100	100	100
Monomer A	9.72	8.18	7.05	6.20	5.53
Initiator B	1.46	1.23	1.06	0.93	0.83
Inhibitor	0.49	0.41	0.35	0.31	0.28
Release Agent	5.83	4.91	4.23	3.72	3.32
Graphite A	340.30	265.85	211.57	170.54	138.31
Modifier B	28.43	28.34	28.35	28.37	28.35
Bulk Conductivity S/cm	55.99	36.57	32.86	18.37	13.59
Tensile psi	2647	2697	2701	2880	2992
Flexural psi	6044	6131	6149	7002	7338
Density g/cm ³	1.75	1.74	1.71	1.72	1.71
Shrink mils/in	-2.5	-2.83	-3.17	-3.33	-3.83

5

10

15

20

Table 4B

Component	23369	23370	23371	23372	23373
Resin D	100	100	100	100	100
Initiator B	1.36	1.15	1.00	0.89	0.79
Inhibitor	0.45	0.38	0.33	0.30	0.26
Release Agent	5.42	4.61	4.01	3.55	3.18
Graphite A	316.17	249.52	200.33	162.48	132.45
Modifier B	28.27	28.21	28.21	28.21	28.21
Bulk Conductivity S/cm	49.49	27.74	25.05	14.01	8.12
Tensile psi	2974	3358	3014	2952	3154
Flexural psi	6394	6099	6520	6312	6071
Density g/cm ³	1.72	1.76	1.69	1.73	1.72
Shrink mils/in	-3.5	-2.5	-2.83	-3.17	-3.53

5

10

15

20

Table 4C

Component	23443	23444	23445	23466	23467
Resin D	100	100	100	100	100
Initiator B	1.84	1.72	1.56	1.81	1.54
Inhibitor	0.46	0.43	0.39	0.45	0.39
Release Agent	5.52	5.15	4.69	5.44	4.62
Graphite A	322.14	291.85	253.91	317.17	250.29
Modifier B	30.23	30.04	30.08	28.23	28.23
Bulk Conductivity S/cm	36	21.2	15	39	21
Tensile psi				2312	2765
Flexural psi				6154	5994
Density g/cm ³	1.76	1.76	1.75	1.75	1.73
Shrink mils/in	-2	-2	-2.33	-1.67	-1.83

Table 4D

Component	23468	23469	23470	23471	23505
Resin D	100	100	100	100	100
Initiator B	1.69	1.75	1.95	2.11	1.48
Inhibitor	0.42	0.44	0.49	0.53	0.37
Release Agent	5.08	5.25	5.85	6.33	4.45
Graphite A	287.77	284.46	331.55	369.39	241.01
Modifier B	28.23	28.23	28.23	28.23	23.47
Fiber D		17.51	19.50	21.11	
Bulk Conductivity S/cm	34		45	60	61
Tensile psi	2466	2804	1797	2010	2821
Flexural psi	5272	7390	6682	4726	4898
Density g/cm ³	1.71	1.6	1.62	1.58	1.75
Shrink mils/in	-2.33	-2	-1.42	-1.67	-2.5

5

10

15

20

-32-

Table 5A

Component	23506	23507	23508	23509	23510
Resin D	100	100	100	100	100
Initiator B	1.63	1.75	1.45	1.59	1.70
Inhibitor	0.41	0.44	0.36	0.40	0.43
Release Agent	4.89	5.24	4.34	4.77	5.11
Graphite A	277.10	305.41	235.17	270.38	298.00
Modifier B	23.47	23.47	20.48	20.48	20.48
Bulk Conductivity S/cm	55	45	52	60	65
Tensile psi	2680	2645			2483
Flexural psi	4556.7	5264.4			4773.67
Density g/cm ³	1.74	1.74	1.79	1.78	1.76
Shrink mils/in	-2.5	-2.33	-2.33	-2.42	-1.75

5

10

15

20

-33-

Table 5B

Component	23566	23567	23568	23581	23582
Resin D	100	100	100	100	100
Initiator B	1.85	1.79	1.75	1.77	1.83
Inhibitor	0.46	0.45	0.44	0.44	0.46
Release Agent	5.54	5.38	5.26	5.30	5.50
Graphite A	346.42	336.32	328.95	313.33	329.82
Modifier B				20.48	20.48
Modifier D	7.62	4.48	2.19		
Bulk Conductivity S/cm		92	94		
Density g/cm ³	1.77	1.78	1.75	1.79	1.76
Shrink mils/in	-1.67	-1.25	-1.25	-1.67	-1.58

5

10

15

20

Table 5C

Component	23583	23584	23585	23592	23593
Resin D	100	100	100	100	100
Initiator B	1.90	1.98	2.07	1.88	1.97
Inhibitor	0.48	0.50	0.52	0.47	0.49
Release Agent	5.71	5.95	6.20	5.63	5.91
Graphite A	347.62	366.88	387.80	352.11	369.46
Modifier B	20.48	20.48	20.48		
Modifier D				9.39	14.78
Bulk Conductivity S/cm				88	59
Density g/cm ³	1.78	1.75	1.71	1.71	1.71
Shrink mils/in	-1.5	-1.25	-1.25	-1.67	-1.67

5

10

15

20

25

Table 5D

Component	23594	23721	23722	23723	23724
Resin D	100	100	100	100	100
Initiator B	2.07	2.19	2.24	1.94	2.00
Inhibitor	0.52	0.55	0.56	0.48	0.50
Release Agent	6.22	6.57	6.71	5.82	6.00
Graphite A	388.6	410.51	419.23	354.03	365.18
Modifier B		27.53	30.24	22.70	26.56
Modifier D	20.73				
Bulk Conductivity S/cm		86	93	68	65
Density g/cm ³	1.71	1.74	1.77	1.77	1.78
Shrink mils/in	-1.25	-1.42	-1.08	-1.5	-1.25

5

10

15

20

25

-36-

Table 6A

Component	23725	23726	23727	23728	23729
Resin D	100	100	100	100	100
Initiator B	2.14	1.90	2.14	1.90	2.14
Inhibitor	0.54	0.48	0.54	0.48	0.54
Release Agent	6.43	5.71	6.43	5.71	6.43
Graphite D	402.14	347.62			
Graphite E			402.14	347.62	
Graphite F					402.14
Modifier B	24.93	20.48	24.93	20.48	24.93
Bulk Conductivity S/cm	96	75	81	62	
Density g/cm ³	1.77	1.78	1.81	1.8	
Shrink mils/in	-1.67	-2.33	-0.83	-1	

5

10

15

20

-37-

Table 6B

Component	23730	23731	23732	23733	23734
Resin D	100	100	100	100	100
Initiator B	1.90	2.14	1.90	2.14	2.14
Inhibitor	0.48	0.54	0.48	0.54	0.54
Release Agent	5.71	6.43	5.71	6.43	6.43
Graphite A				249.33	249.33
Graphite E				152.82	
Graphite F	347.62				152.82
Graphite G		402.14	347.62		
Modifier B	20.48	24.93	20.48	24.93	24.93
Bulk Conductivity S/cm		32	30	48	25
Density g/cm ³				1.81	1.81
Shrink mils/in				-1.33	-1.83

5

10

15

20

-38-

Table 6C

Component	23735	23736	23737	23738	23739
Resin D	100	100	100	100	100
Initiator B	2.14	2.14	1.90	1.90	1.90
Inhibitor	0.54	0.54	0.48	0.48	0.48
Release Agent	6.43	6.43	5.71	5.71	5.71
Graphite A	249.33	249.33	215.52	215.52	215.52
Graphite D		152.82			
Graphite E			132.10		
Graphite F	152.82			132.10	
Graphite G	152.82				132.10
Modifier B	24.93	24.93	20.48	20.48	20.48
Bulk Conductivity S/cm	38	90	50	26	31
Density g/cm ³	1.79	1.67	1.79	1.8	1.8
Shrink mils/in	-2.08	-1.58	-1.83	-2.33	-2.67

5

10

15

Table 6D

Component	23740	23755	23756	23757	23758
Resin D	100	100	100	100	100
Initiator B	1.90	2.17	2.20	1.93	1.95
Inhibitor	0.48	0.54	0.55	0.48	0.49
Release Agent	5.71	6.52	6.61	5.78	5.85
Graphite A	215.52	407.61	413.22	341.81	356.10
Graphite D	132.10				
Modifier B	20.48	23.91	22.87	19.52	18.54
Modifier D		2.72	5.51	2.41	4.88
Bulk Conductivity S/cm	68	70	97	92	89
Density g/cm ³	1.75	1.77	1.67	1.79	1.79
Shrink mils/in	-1.83	-1.83	-1.83	-2	-2.17

5

10

15

20

Table 7A

Component	23803	23804	23805	23806	23830
Resin D	100	100	100	100	100
Initiator B	2.06	2.09	2.16	2.19	2.16
Inhibitor	0.52	0.52	0.54	0.55	0.54
Release Agent	6.19	6.27	6.49	6.58	6.49
Graphite A	376.29	381.20	394.59	405.48	394.59
Modifier B	25.26	25.59	25.59	26.30	30.00
Modifier E	5.15	6.53	10.81	6.85	6.76
Bulk Conductivity S/cm	62	83	83	90	
Density g/cm ³	1.77	1.77	1.76	1.77	1.79
Shrink mils/in	-1.83	-1.50	-1.33	-1.67	-1.58

Table 7B

Component	23831	23832	23833	23834	23835
Resin D	100	100	100	100	100
Initiator B	2.11	2.18	2.23	2.09	2.09
Inhibitor	0.53	0.54	0.56	0.52	0.52
Release Agent	6.33	6.54	6.69	6.27	6.27
Graphite A	385.22	397.82	406.69		
Graphite H				381.20	
Graphite I					381.20
Modifier B	25.59	25.61	25.63	25.59	25.59
Modifier E		6.81	6.96	6.53	6.53
Density g/cm ³	1.74	1.76	1.72		
Shrink mils/in	-1.42	-1.33	-1.25		

Table 7C

Component	23836	23837	23838	23839	23840
Resin D	100	100	100	100	100
Initiator B	2.09	2.24	2.24	2.24	2.24
Inhibitor	0.52	0.56	0.56	0.56	0.56
Release Agent	6.27	6.71	6.71	6.71	6.71
Graphite A		408.28	408.28	408.28	408.28
Graphite J	381.20				
Carbon B		0.56			
Carbon C			0.56		
Carbon D				0.56	
Carbon E					0.56
Modifier B	25.59	25.56	25.56	25.56	25.56
Modifier E	6.53	6.99	6.99	6.99	6.99
Modifier F		8.39	8.39	8.39	8.39
Density g/cm ³		1.77	1.80	1.76	1.74
Shrink mils/in		-1.08	-0.92	-1.17	-1.08

5

10

15

20

-42-

Table 7D

Component	23878	23879	23880	23881	23896
Resin D	100	100	100	100	100
Initiator B	2.26	2.37	2.28	2.39	1.48
Inhibitor	0.57	0.59	0.57	0.60	0.49
Release Agent	6.79	7.11	6.83	7.16	5.93
Graphite A	418.55	444.31	421.41	447.49	370.74
Modifier B	25.57	25.59	25.57	25.60	5.68
Modifier C					9.99
Modifier E			7.12	7.46	
Modifier F	11.88	12.44	5.69	5.97	

5

Table 8A

Component	23297	23301	23302	23363	23422
Resin E	100	100	100	100	100
Initiator B	1.56	1.38	1.33	1.06	1.75
Inhibitor	0.52	0.46	0.44	0.35	0.58
Release Agent	6.24	5.50	5.31	4.24	7.00
Graphite A	395.22	343.88	331.86	240.03	466.74
Modifier B	5.98	2.66	1.28	2.65	2.68
Modifier C	10.50	4.63	2.26	4.66	4.67
Bulk Conductivity S/cm		72.5		35	
Density g/cm ³		1.62		1.53	1.6
Shrink mils/in		-2.33		-1.33	-0.92

5

Table 8B

Component	23423	23452	23453	23454	23455
Resin D		50.03	60.00	70.03	80.00
Resin E	100				
Resin F		49.97	40.00	29.97	20.00
Initiator B	2.40	2.14	2.14	2.14	2.14
Inhibitor	0.80	0.54	0.54	0.54	0.54
Release Agent	9.61	6.43	6.43	6.43	6.43
Graphite A	680.54	402.14	402.14	402.14	402.14
Modifier B	2.64	24.93	24.93	24.93	24.93
Modifier C	4.64				
Bulk Conductivity S/cm		63	70.5	70	83.5
Tensile psi		2441	2497	2404	2561
Flexural psi		5030	5126	4284	5391
Density g/cm ³	1.47	1.71	1.74	1.75	1.66
Shrink mils/in	-0.25	-1.17	-1.58	-1.67	-1.42

10

15

Table 8C

Component	23530	23531	23646	23647	23648
Resin F	100	100			
Resin G			100	100	100
Initiator B	1.85	1.79	1.81	1.91	2.02
Inhibitor	0.46	0.45	0.45	0.48	0.50
Release Agent	5.54	5.38	5.42	5.72	6.06
Graphite A	346.42	336.32	338.75	357.65	378.60
Modifier B			5.24	11.11	17.62
Modifier D	7.62	4.48			
Bulk Conductivity S/cm			86	58	46
Tensile psi	2305.56	2155.56			
Flexural psi	4548.8	4421.3			
Density g/cm ³	1.69	1.75	1.71	1.72	1.65
Shrink mils/in	-0.42	-1.67	-1.58	-1.42	-1.33

5

10

15

20

Table 8D

Component	23649	23650	23651	23688
Resin D				53.96
Resin I	100	100	100	
Resin J				46.04
Initiator B	1.75	1.77	1.79	
Initiator D				2.08
Inhibitor	0.44	0.44	0.45	0.52
Release Agent	5.26	5.31	5.38	6.25
Graphite A	328.95	331.86	336.32	385.42
Modifier B				15.63
Modifier D	2.19	3.10	4.48	
Modifier F				10.94
Bulk Conductivity S/cm	93	79	64	
Density g/cm ³	1.77	1.74	1.73	
Shrink mils/in	-1.5	-1.08	-1.5	

5 While in accordance with the Patent Statutes, the best mode and preferred embodiment have been set forth, the scope of the invention is not limited thereto, but rather by the scope of the attached claims.

What is claimed is:

1. A composition comprising

- 5 a) an unsaturated prepolymer resin which comprises one or more of
unsaturated polyester and vinyl ester resin;
 b) an unsaturated material copolymerizable with said resin and
including a terminal ethylene group;
 c) at least 50% by total weight of the composition comprising an
conductive filler;
10 d) an initiator to initiate said copolymerization; and
 e) an effective amount of a rheological modifier to prevent phase
separation between said resin and said conductive filler during molding, said
rheological modifier being one or more compositions selected from the group
consisting of Group II oxides and hydroxides, carbodiamides, aziridines,
15 polyisocyanates, polytetrafluoroethylene, perfluoropolyether, polyethylene
and fumed silica, and clays.

2. A composition as set forth in claim 1 wherein the effective amount of said
rheological modifier is from about 0.5 % to about 15 % by total weight of the
20 system.

3. A composition as set forth in claim 2 wherein the conductive filler is a
particulate or flake filler and the amount of said conductive filler is at least 60
weight percent .

25

4. A composition as set forth in claim 3 wherein the conductive filler is a
graphite filler and the amount of said conductive filler is at least 65 weight
percent.

30

5. A composition as set forth in claim 1, wherein said rheological modifier
comprises magnesium oxide and/or calcium oxide and said effective amount
is from about 0.1 to about 2 weight percent based on the weight of said
composition.

-48-

6. A composition as set forth in claim 1, wherein said rheological modifier is one or more of aziridine, carbodiimide, and polyisocyanate and said effective amount is from about 1 to about 10 weight percent based on the weight of said composition.

7. A composition as set forth in claim 1, wherein said effective amount of rheological modifier is an effective amount to prevent cracking of a part molded at a pressure from about 400 to about 2000 psi and to a thickness of from about 0.050 to about 0.200 inches.

8. A composition as set forth in claim 1, wherein said modifier comprises one or more of polytetrafluoroethylene, perfluoropolyether and said effective amount is from about 0.1 to about 5 weight percent based on the weight of said molding composition.

9. A composition as set forth in claim 1, wherein said rheological modifier is polyisocyanate and said effective amount is from about 2 to about 8 weight percent based on the weight of said molding composition.

10. A composition as set forth in claim 4 wherein said conductive filler is a synthetic crystalline graphite particle and said unsaturated prepolymer resin is one or more resins selected from the group consisting of epoxy vinyl resin, bisphenol fumarate resin, modified bisphenol fumarate polyester resin, unsaturated polyester resin, urethane-modified vinyl ester resin, bisphenol-epoxy vinylester resin, elastomer-modified vinyl ester resin, epoxy novolac vinyl ester resin and unsaturated isocyanurate vinyl ester resin.

11. A composition as set forth in claim 10 wherein said copolymerizable material is one or more monomers selected from the group consisting of styrene, alpha-methyl styrene, chloro-styrene, vinyl toluene, divinyl benzene, diallylphthalate, and methyl methacrylate, and mixture thereof.

12. A composition as set forth in claim 11 wherein said copolymerizable material is one or more monomers selected from the group consisting of styrene and methyl methacrylate.
- 5 13. A composition as set forth in claim 12 wherein said initiator is a free radical initiator.
- 10 14. A composition as set forth in claim 13 wherein said initiator is selected from the group consisting of peroxides, hydroperoxides, redox systems, diazo compounds, persulfates, and perbenzoates, and is used in amounts of about 0.05 to about 5 weight percent based on the total weight of the system.
- 15 15. A composition as set forth in claim 14 further comprising carbon black.
16. A composition as set forth in claim 14 further comprising reinforcing fillers.
- 20 17. An electrochemical cell flow field plate comprising a molded thermosetting resin composition having a thickness from about 0.050 to about 0.200 inches and a bulk conductivity of at least 55 S/cm, said molded resin composition being the reaction product of at least:
- a) an unsaturated prepolymer resin which comprises one or more of unsaturated polyester and vinyl ester resin;
 - 25 b) an unsaturated material copolymerizable with said resin and including a terminal ethylene group;
 - c) at least 50% by total weight of the composition comprising an conductive filler;
 - d) an initiator to initiate said copolymerization; and
 - 30 e) an effective amount of a rheological modifier to prevent phase separation between said resin and said conductive filler during molding, said rheological modifier being one or more compositions selected from the group consisting of Group II oxides and hydroxides, carbodiamides, aziridines,

-50-

polyisocyanates, polytetrafluoroethylene, perfluoropolyether, polyethylene, clays and fumed silica.

5 18. An electrochemical cell flow field plate as set forth in claim 17 wherein the effective amount of said rheological modifier is from about 0.5 % to about 15 % by total weight of the system.

10 19. An electrochemical cell flow field plate as set forth in claim 18 wherein the conductive filler is a particulate filler and the amount of said conductive filler is at least 60 weight percent .

15 20. An electrochemical cell flow field plate as set forth in claim 19 wherein the filler is a graphite filler and the amount of said conductive filler is at least 65 weight percent.

20 21. An electrochemical cell flow field plate as set forth in claim 17, wherein said rheological modifier comprises magnesium oxide and/or calcium oxide and said effective amount is from about 0.1 to about 2 weight percent based on the weight of said composition.

25 22. An electrochemical cell flow field plate as set forth in claim 17, wherein said rheological modifier is one or more of aziridine and polyisocyanate and said effective amount is from about 1 to about 10 weight percent based on the weight of said composition.

30 23. An electrochemical cell flow field plate as set forth in claim 17, wherein said effective amount of rheological modifier is an effective amount to prevent cracking of a part molded at a pressure from about 400 to about 5000 psi and to a thickness of from about 0.050 to about 0.200 inches.

24. An electrochemical cell flow field plate as set forth in claim 17, wherein said modifier comprises one or more of polytetrafluoroethylene, perfluoropolyether and said effective amount is from about 0.1 to about 5 weight percent based on the weight of said molding composition.

5 25. An electrochemical cell flow field plate as set forth in claim 17, wherein said rheological modifier is polyisocyanate and said effective amount is from about 2 to about 8 weight percent based on the weight of said molding composition.

10 26. An electrochemical cell flow field plate as set forth in claim 20 wherein said conductive filler is a synthetic crystalline graphite particle and said unsaturated prepolymer resin is one or more resins selected from the group consisting of epoxy vinyl resin, bisphenol fumarate resin, modified bisphenol fumarate polyester resin, unsaturated polyester resin, urethane modified vinyl ester resin, urethane-modified vinyl ester resin, bisphenol-epoxy vinyl ester resin, elastomer-modified vinyl ester resin, epoxy novolac vinyl ester resin and unsaturated isocyanurate vinyl ester resin.

15 27. An electrochemical cell flow field plate as set forth in claim 26 wherein said copolymerizable material is one or more monomers selected from the group consisting of styrene, alpha-methyl styrene, chloro-styrene, vinyl toluene, divinyl benzene, diallylphthalate, and methyl methacrylate, and
20 mixtures thereof.

25 28. An electrochemical cell flow field plate as set forth in claim 27 wherein said copolymerizable material is one or more monomers selected from the group consisting of styrene and methyl methacrylate.

29. An electrochemical cell flow field plate as set forth in claim 28 wherein said initiator is a free radical initiator.

30 30. An electrochemical cell flow field plate as set forth in claim 29 wherein said initiator is selected from the group consisting of peroxides, hydroperoxides, redox systems, diazo compounds, persulfates, and perbenzoates, and is used in amounts of about 0.05 to about 5 weight percent based on the total weight of the system.

-52-

31. An electrochemical cell flow field plate as set forth in claim 30 further comprising carbon black.

5 32. An electrochemical cell flow field plate as set forth in claim 30 further comprising reinforcing fillers.

33. A conductive molding composition comprising:

a) 100 parts of an unsaturated prepolymer resin which comprises one or more of unsaturated polyester and vinyl ester resin;

10 b) an unsaturated monomer selected from the group consisting of styrene, alpha-methyl styrene, chloro-styrene, vinyl toluene, divinyl benzene, diallylphthalate, and methyl methacrylate, and mixture thereof; wherein the ratio of monomers to unsaturated prepolymer resin is from about 40:60 to about 72:25 by weight of the a and b,

15 c) at least about 225 phr of an conductive filler such that a molded product made from said composition has a bulk conductivity of at least about 55 S/cm when measured in accordance with ASTM Test No. F1529-97;

d) from about 0.5 to about 4.0 phr of an initiator to initiate said copolymerization; and

20 e) from about 0.5 to about 20 phr of a rheological modifier which is one or more compositions selected from the group consisting of Group II oxides and hydroxides, carbodiamides, aziridines, polyisocyanates, polytetrafluoroethylene, perfluoropolyether, polyethylene, clay and fumed silica and mixtures thereof.

25

34. A conductive molding composition as set forth in claim 33 wherein said prepolymer resin is selected from the group consisting of epoxy vinyl resin, bisphenol fumarate resin, modified bisphenol fumarate polyester resin, unsaturated polyester resin, urethane modified vinyl ester resin, urethane-modified vinyl ester resin, bisphenol-epoxy vinylester resin, elastomer-modified vinyl ester resin, epoxy novolac vinyl ester resin and unsaturated isocyanurate vinyl ester resin.

30

35. A conductive molding composition as set forth in claim 34 wherein the conductive filler is a particulate or flake filler and the amount of said conductive filler is at least 250 phr .

5 36. A conductive molding composition as set forth in claim 35 wherein the conductive filler is a graphite filler and the amount of said conductive filler is at least 275 phr.

10 37. A conductive molding composition as set forth in claim 33, wherein said rheological modifier comprises magnesium oxide and/or calcium oxide and said effective amount is from about 0.5 to about 20 phr.

15 38. A conductive molding composition as set forth in claim 33, wherein said rheological modifier is one or more of aziridine, carbodiimide and polyisocyanate and said effective amount is from about 0.5 to about 20 phr.

20 39. A conductive molding composition as set forth in claim 33, wherein said modifier comprises one or more of polytetrafluoroethylene, perfluoropolyether and said effective amount is from about 0.5 to about 20 phr.

25 40. A conductive molding composition as set forth in claim 33, wherein said rheological modifier is polyisocyanate and said effective amount is from about 0.5 to about 20phr.

 41. A conductive molding composition as set forth in claim 33 wherein said copolymerizable material is one or more monomers selected from the group consisting of styrene and methyl methacrylate.

30 42. A conductive molding composition as set forth in claim 33 wherein said initiator is selected from the group consisting of peroxides, hydroperoxides, redox systems, diazo compounds, persulfates, and perbenzoates, and is used in amounts of about 0.05 to about 20phr.

43. A conductive molding composition as set forth in claim 42 further comprising carbon black.

44. A conductive molding composition in claim 43 further comprising reinforcing fillers.

45. A molded conductive article comprising the cured reaction product of:
a) 100 parts of an unsaturated prepolymer resin, which comprises one or more of unsaturated polyester and vinyl ester resin;

b) an unsaturated monomer selected from the group consisting of styrene, alpha-methyl styrene, chloro-styrene, vinyl toluene, divinyl benzene, diallylphthalate, and methyl methacrylate, and mixture thereof, wherein the ratio of monomers to unsaturated prepolymer resin is from about 40:60 to about 72:25 by weight of the two components,

c) at least about 225 phr of a conductive filler such that said composition has a bulk conductivity of at least about 55 S/cm when measured in accordance with ASTM Test No. F1529-97;

d) from about 0.5 to about 4.0 phr of an initiator to initiate said copolymerization; and

e) from about 0.5 to about 20 phr of a rheological modifier which is one or more compositions selected from the group consisting of Group II oxides and hydroxides, carbodiamides, aziridines, polyisocyanates, polytetrafluoroethylene, perfluoropolyether, polyethylene, clay and fumed silica and mixtures thereof.

46. A molded conductive article as set forth in claim 45 wherein said initiator is selected from the group consisting of peroxides, hydroperoxides, redox systems, diazo compounds, persulfates, and perbenzoates, and is used in amounts of about 0.5 to about 4phr.

47. A molded conductive article as set forth in claim 46 further comprising carbon black.

48. A molded conductive article in claim 46 further comprising reinforcing fillers.

5 49. A molded conductive product as set forth in claim 45 wherein said unsaturated prepolymer resin is one or more resins selected from the group consisting of epoxy vinyl resin, bisphenol fumarate resin, modified bisphenol fumarate polyester resin, unsaturated polyester resin, urethane modified vinyl ester resin, urethane-modified vinyl ester resin, bisphenol-epoxy vinyl ester resin, elastomer-modified vinyl ester resin, epoxy novolac vinyl ester resin and unsaturated isocyanurate vinyl ester resin.

50. A method of molding highly loaded polymer which is the reaction product of a composition comprising:

- 15 a) an unsaturated prepolymer resin which comprises one or more of unsaturated polyester and vinyl ester resin;
- b) an unsaturated material monomer copolymerizable with said resin and including a terminal ethylene group;
- c) at least 50% by total weight of the composition comprising a conductive filler;
- 20 d) an initiator to initiate said copolymerization;

said method comprising the addition prior to curing of a rheological agent selected from the group comprising Group II oxides and hydroxides; carbodiamides; aziridines; polyisocyanates; polytetrafluoroethylene (PTFE); perfluoropolyether (PFPE), polyethylene, clay, and fumed silica ; and

25 subsequently molding said composition under heat and pressure to initiate cure and form said article.

51. A method as set forth in claim 50 wherein said molding is either compression molding or injection molding.

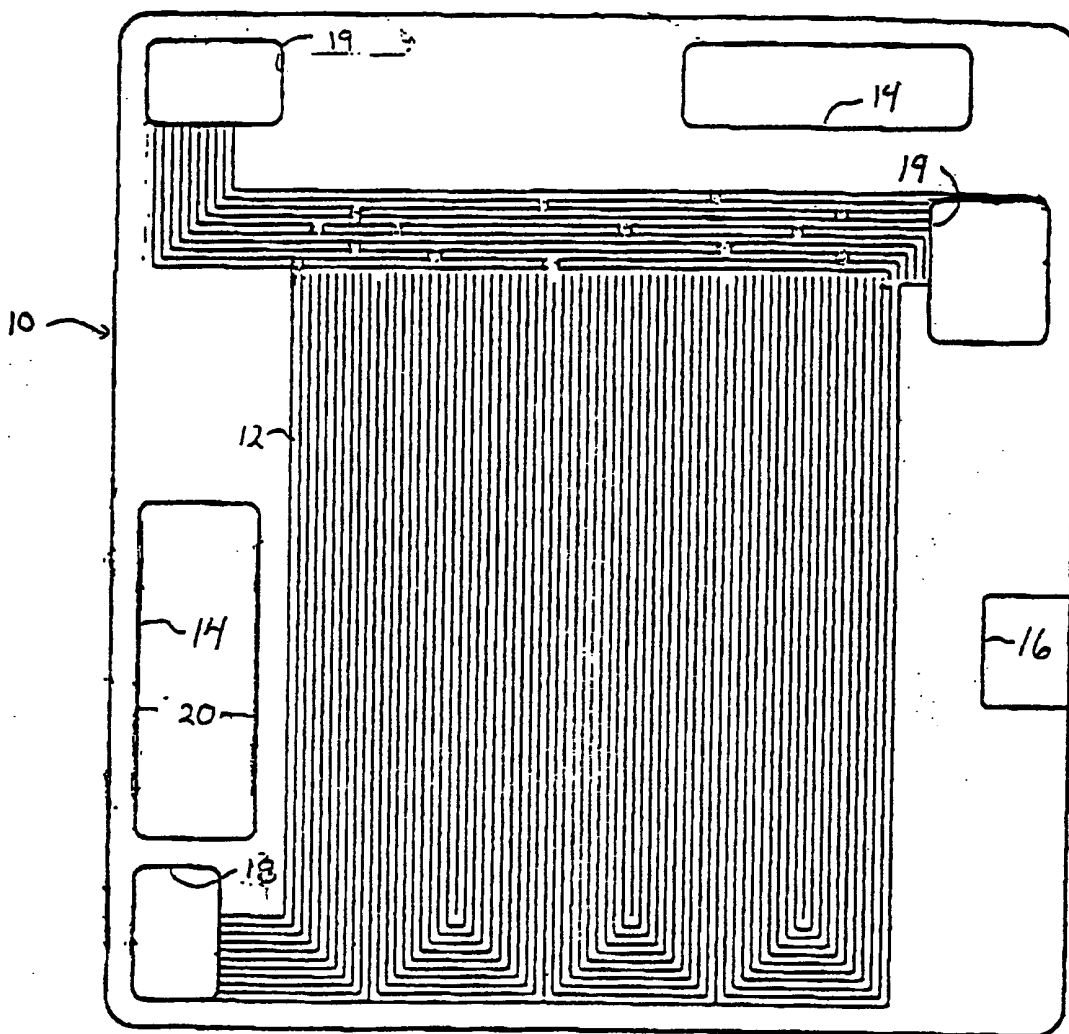


FIGURE 1

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/06999

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01M6/18 H01M10/40 C08F283/01 C08F290/06 C08K3/04
C08L67/06 C08L63/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01M C08F C08L C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 614 581 A (COBBLEDICK DAVID S ET AL) 25 March 1997 (1997-03-25) column 4, line 41-57 column 3, line 53 -column 4, line 24 ---	1-5, 10-16,33
X	US 4 908 157 A (FONTANA JACK J ET AL) 13 March 1990 (1990-03-13) column 3, line 1-20 ---	1
A	US 5 250 228 A (BAIGRIE STEPHEN ET AL) 5 October 1993 (1993-10-05) claim 1 ---	1
A	US 5 516 546 A (HARI SIEGFRIED ET AL) 14 May 1996 (1996-05-14) claim 1 -----	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

S" document member of the same patent family

Date of the actual completion of the international search

31 July 2000

Date of mailing of the international search report

08/08/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040. Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

MEULEMANS, R

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. ational Application No

PCT/US 00/06999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5614581 A	25-03-1997	DE 69408195 D DE 69408195 T EP 0622386 A JP 6320681 A KR 138483 B	05-03-1998 05-11-1998 02-11-1994 22-11-1994 27-04-1998
US 4908157 A	13-03-1990	NONE	
US 5250228 A	05-10-1993	US 5382384 A	17-01-1995
US 5516546 A	14-05-1996	DE 4317302 A CA 2124133 A EP 0626430 A FI 942402 A SG 49822 A	01-12-1994 26-11-1994 30-11-1994 26-11-1994 15-06-1998

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 September 2000 (28.09.2000)

PCT

(10) International Publication Number
WO 00/57506 A1

- (51) International Patent Classification?: H01M 6/18, 10/40, C08F 283/01, 290/06, C08K 3/04, C08L 67/06, 63/10
- (21) International Application Number: PCT/US00/06999
- (22) International Filing Date: 17 March 2000 (17.03.2000)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/125,138 19 March 1999 (19.03.1999) US
09/562,641 16 March 2000 (16.03.2000) US
- (71) Applicant: PREMIX [US/US]; Rt. 20 & Harmon Road, North Kingsville, OH 44068-0281 (US).
- (72) Inventor: BUTLER, Kurt, L.; 4585 Gageville Monroe Road, Kingsville, OH 44048 (US).
- (74) Agents: TYRPAK, Michele, M. et al.; Hudak & Shunk Co., L.P.A., Suite 808, 7 West Bowery Street, Akron, OH 44308-1133 (US).
- (81) Designated States (*national*): AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— With international search report.
- (48) Date of publication of this corrected version: 5 April 2001
- (15) Information about Correction: see PCT Gazette No. 14/2001 of 5 April 2001, Section II
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 00/57506 A1

(54) Title: HIGHLY CONDUCTIVE MOLDING COMPOUNDS AND FUEL CELL BIPOLAR PLATES COMPRISING THESE COMPOUNDS

(57) Abstract: A conductive polymer is disclosed which is suitable for use in applications which require corrosion resistance including resistance to corrosion when subjected to acidic flow at temperature ranging from -40 to 140 degrees Fahrenheit and which can be molded into highly intricate and thin specimens which exhibit consistent conductivity, sufficient strength and flexibility, and appropriate surface characteristics. In particular the invention involves molding unsaturated prepolymer resin composition, which have high loadings of conductive fillers. Further to enable the necessary characteristics, the compositions include rheological modifiers such as Group II oxides and hydroxides; carbodiimides; aziridines; polyisocyanates; polytetrafluoroethylene (PTFE); perfluoropolyether (PFPE), and polyethylene. Ostensibly, these modifiers act to alter the apparent molecular weight and three dimensional prepolymer network structures correcting rheological deficiencies which otherwise lead to excessive resin particulate separation during the molding process and large variances in bulk conductivity across the plate surface. The composition is disclosed for use in electrochemical cells, such as fuel cells.

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 September 2000 (28.09.2000)

PCT

(10) International Publication Number
WO 00/57506 A1

(51) International Patent Classification⁷: H01M 6/18,
10/40, C08F 283/01, 290/06, C08K 3/04, C08L 67/06,
63/10

FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG,
MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE,
SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU,
ZW.

(21) International Application Number: PCT/US00/06999

(22) International Filing Date: 17 March 2000 (17.03.2000)

(25) Filing Language: English

(26) Publication Language: English

(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent
(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,
MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GW, ML, MR, NE, SN, TD, TG).

(30) Priority Data:
60/125,138 19 March 1999 (19.03.1999) US
09/562,641 16 March 2000 (16.03.2000) US

Published:
— with international search report

(71) Applicant: QUANTUM COMPOSITES, INC. [US/US];
1310 South Valley Center Drive, Bay City, MI 48706 (US).

(48) Date of publication of this corrected version:
2 May 2002

(72) Inventor: BUTLER, Kurt, I.; 4585 Gageville Monroe
Road, Kingsville, OH 44048 (US).

(74) Agents: TYRPAK, Michele, M. et al.; Hudak & Shunk
Co., L.P.A., Suite 808, 7 West Bowery Street, Akron, OH
44308-1133 (US).

(15) Information about Corrections:
see PCT Gazette No. 18/2002 of 2 May 2002, Section II
Previous Correction:
see PCT Gazette No. 14/2001 of 5 April 2001, Section II

(81) Designated States (*national*): AL, AM, AT, AU, AZ, BA,
BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES,

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

WO 00/57506 A1

(54) Title: HIGHLY CONDUCTIVE MOLDING COMPOUNDS AND FUEL CELL BIPOLAR PLATES COMPRISING THESE COMPOUNDS

(57) Abstract: A conductive polymer is disclosed which is suitable for use in applications which require corrosion resistance including resistance to corrosion when subjected to acidic flow at temperature ranging from -40 to 140 degrees Fahrenheit and which can be molded into highly intricate and thin specimens which exhibit consistent conductivity, sufficient strength and flexibility, and appropriate surface characteristics. In particular the invention involves molding unsaturated prepolymer resin composition, which have high loadings of conductive fillers. Further to enable the necessary characteristics, the compositions include rheological modifiers such as Group II oxides and hydroxides; carbodiimides; aziridines; polyisocyanates; polytetrafluoroethylene (PTFE); perfluoropolyether (PFPE), and polyethylene. Ostensibly, these modifiers act to alter the apparent molecular weight and three dimensional prepolymer network structures correcting rheological deficiencies which otherwise lead to excessive resin particulate separation during the molding process and large variances in bulk conductivity across the plate surface. The composition is disclosed for use in electrochemical cells, such as fuel cells.

HIGHLY CONDUCTIVE MOLDING COMPOUNDS AND FUEL CELL BIPOLAR PLATES COMPRISING THESE COMPOUNDS

5

Field of Invention

10 The field of invention is highly conductive compositions that are particularly useful for molding processes such as those using thermosetting bulk molding compositions. These molding compositions can be formed into high definition complex configurations. For example, they can be molded into thin plate-like specimens (e.g. 60 to 200 thousandths of an inch) having an intricately patterned network of very narrow, relatively smooth, flow
15 passages. These specimens are used as electrochemical cell bipolar plates. These plates desirably have a bulk conductivity of at least 40, 50, 60, 70, 80, 90 or even 96 S/cm. They also have desirable surface characteristics; heat, temperature, chemical and shrink resistance; strength; and cost.

20

Background of the Invention

Conductive polymers have applications in providing alternatives to traditional conductive materials, which often involve greater labor expenses to manufacture into complex parts. In particular, in instances where the
25 demand justifies significant volumes of a product, polymer molding expenses may prove far more cost effective than comparable machining expenses for other materials. However in the past, it has proved difficult to achieve both a high level of conductivity and desirable molding characteristics. Generally, high level weight percentages of an appropriate filler in a polymeric matrix
30 are necessary to achieve satisfactory levels of conductivity. However, these high load levels lead to problems with the strength, durability, and moldability of the resulting composition.

One area in particular where it would be beneficial to solve the previously mentioned strength, durability, and molding issues is for
35 application in fuel cells. Electrochemical fuel cells have great appeal as a potentially limitless energy source that is clean and environmentally friendly.

These fuel cells can, in addition, be constructed at an appropriate scale for small scale energy consumption, such as household use, or for industrial scale use, and even for commercial power generation. They have portable applications to power small appliances (such as computers or camping equipment), or automobiles and other forms of transportation. Although these different applications involve differences in size, the fundamental construction remains the same for generation of power varying from less than one to a few thousand kilowatts.

Basically, a fuel cell is a galvanic cell in which the chemical energy of a fuel is converted directly into electrical energy by means of an electrochemical process. The fundamental components of the fuel cell are an electrode comprising an anode and a cathode, electrocatalysts, and an electrolyte. Work has been done in perfecting both liquid and solid electrolyte fuel cells and the present invention may find use in both types of fuel cells.

Solid electrolytes include polymeric membranes, which act as proton exchange membranes typically fueled by hydrogen. These membranes usually comprise a perfluorinated sulphonic acid polymer membrane sandwiched between two catalyzed electrodes that may utilize platinum supported on carbon as an electrocatalyst. Hydrogen fuel cells form a reaction chamber, which consumes hydrogen at the anode. At the cathode, oxygen reacts with protons and electrons at the electrocatalytic sites yielding water as the reaction product. A three-phase interface is formed in the region of the electrode and a delicate balance must be maintained between the electrode, the electrolyte, and the gaseous phases.

Systems involving the use of other electrolytes have also been studied. These would include alkaline fuel cells, phosphoric acid fuel cell, molten carbonate fuel cells, and solid oxide fuel cells. However, the principles are similar, as are some of the issues in perfecting these products.

A fuel cell reactor may comprise a single-cell or a multi-cell stack. In any case, the cell includes at least two highly conductive flow field plates that serve multiple functions. These plates may function as current collectors that provide electrical continuity between the fuel cell voltage terminals and electrodes. They also provide mechanical support (for example for the

membrane/electrode assembly). In addition, these plates act to transport reactants to the electrodes and are essential to establishing the previously mentioned delicate phase balance.

Typically, the fuel cell plates are thin relatively flat plate members that include a highly complex network of interconnecting channels that form the flow field area of the plate. The configuration of these channels is highly developed in order to maintain the proper flow of reactants and to avoid channeling or the formation of stagnant areas, which results in poor fuel cell performance. It is critical that the flow of the reactants is properly managed, and that the electrocatalysts are continuously supplied with precisely the appropriate balance of reactants. Thus, it is essential for the plates to define and maintain clear passages within the highly engineered flow labyrinth. Moreover, in order to assure a satisfactory life, the plates must be able to resist surface corrosion under a variety of conditions. For example, fuel cells may be placed outside and subject to ambient weather. Thus, the cells must be resistant to stress cracking and corrosion at temperatures ranging from – 40 to 200 degrees Fahrenheit. Further, since the conditions within the cell are corrosive, the cells must also be resistant to chemical attack at these temperatures from various corrosive substances. For example, the plates may be subjected to de-ionized water, methanol, formic acid, formaldehyde, heavy naptha, hydrofluoric acid, tertafluoroethylene, and hexafluoropropylene depending on the fuel cell type. Moreover, the conditions within the fuel cell may lead to elevated temperatures, i.e. from 150 to 200 degrees Fahrenheit, as well as elevated pressures, i.e. from ambient to 30 p.s.i. Corrosive decomposition needs to be avoided since it almost certainly would cause a system failure by changing the flow patterns within the fuel cell.

Past attempts at solving the various requirements for fuel cell plates have included the use of metal and machined graphite plates. The use of metal plates result in higher weight per cell, higher machining costs and possibly corrosion problems. Machined graphite plates solve the weight and corrosion problems but involve high machining cost and result in fragile products, especially when prepared as very thin plates. Some use of

graphite/poly(vinylidene fluoride) plates has been made but these have been characterized as being expensive and brittle and having long cycle times.

U.S. Patent No. 4,197,178 is incorporated herein for its teaching of the working and compositions of electrochemical cells. U.S. Patent No. 4,301,222 is incorporated herein for its teachings on graphite based separators for electrochemical cells.

Summary of the Invention

In the past, known conventional bulk molding compounds have been modified to be conductive by the addition of large amounts of conductive filler, such as graphite. During molding it was observed that the liquid resin phase separated from the filler and was exuded from the molding. Further, it was observed that this occurrence tended to cause cracking in molded specimens that were thin. Moreover, bulk conductivity measurements at different locations within the specimen were inconsistent. In accordance with the present invention, it was discovered that compositions could be formulated which solved the foregoing issues. In particular, the formulations involve the use of a resin matrix with high loadings of a conductive filler; various additional additives, such as initiators, mold-release agents, and carbon black; and one or more rheological agents selected from the group comprising group II oxides, alkaline earth oxides, carbodiamides, polyisocyanates, polyethylene and polytetraethylene fluorethylene. One possible explanation for the mechanism by which the molding agents work, is that they act to build the apparent molecular weight of the prepolymer (e.g. vinyl ester resin or unsaturated polyester resin). Alternatively, these agents may promote flow such as by reducing shear during molding. The use of these rheological agents eliminates phase separation, as well as cracking and inconsistent conductivity measurements. It is anticipated that these problems are a result of the complex configuration of the specimens being molded along with the very high concentrations of conductive filler.

In addition to solving molding and cracking problems it is anticipated that other properties such as the coefficient of thermal expansion, electrical and thermal conductivity, shrink resistance and mechanical properties may be more uniform and/or otherwise improved as a result of the use of the present invention. In addition to the foregoing improvements it was found

that a resin composition of the invention demonstrated a higher glass transition temperature and resulted in an improvement in the hot strength of the molded part. Further improvements are also possible by optimizing both gel time and cure time for the prepolymer by controlling initiator type and amount and inhibitor type and amount.

The foregoing improvements in specimens molded from these compositions enable the low cost mass production of bipolar plates as an additional embodiment of the invention. These could be used for portable fuel cells, as well as stationary power units.

Brief Description of the Drawings

Figure 1 is an illustration of a fuel cell assembly utilizing a bipolar cell plate; and

Figure 2 is an illustration of a bipolar fuel cell plate that can be made in accordance with the present invention.

Detailed Description of the Invention

The invention relates to improvements in conductive molding compositions. In particular, the compositions can be used in compression molding processes and in injection molding processes. Further these compositions enable the production of thin and intricate specimens that have high concentrations of conductive filler.

Sheet molding and bulk molding compositions are described in U.S. Patents 5,998,510; 5,342,554; 5,854,317; 5,744,816; and 5,268,400; all of which are hereby incorporated by reference for their teachings on the various modifications to molding compositions that are known to the art.

One component of a molding resin composition is a crosslinkable prepolymer such as an unsaturated polyester resin or vinyl ester resin. Desirably the prepolymer has a relatively low molecular weight such as from about 200 to about 5000 (weight average). They are described in detail

with examples in the above patents incorporated by reference. The polyester resins are the condensation product derived from the condensation of unsaturated polybasic acids and/or anhydrides with polyols such as dihydroxy or trihydroxy compounds. Desirably, these polyester resins are the esterification reaction product of diacids, or anhydrides of diacids, generally having from about 3 to about 12, or more preferably from about 4 to about 8 carbon atoms, with a polyol or a cyclic ether having from about 2 to about 12, or more preferably from about 2 to about 6 carbon atoms.

In general, the vinyl ester resins that can be used are the reaction products of epoxy resins and a monofunctional ethlenically unsaturated carboxylic acid. More specifically, these vinyl ester resins are the reaction product of an epoxy terminated oligomer, for example, an epoxy functionalized bisphenol A with an acrylic acid, or methacrylic acid forming acrylic terminal groups on the oligomer. The vinyl esters have predominantly terminal unsaturation while the unsaturated polyesters have predominantly internal unsaturation.

Another component of the molding composition is one or more unsaturated monomers that are copolymerizable with the resin. Desirably, this component is capable of dissolving the resin component at room temperature. Thus, in one embodiment the resin is dissolved in the monomeric component prior to being combined with the remaining components. Examples of suitable monomers are styrene, alpha-methyl styrene, chloro-styrene, vinyl toluene, divinyl benzene, diallylphthalate, methyl methacrylate, and mixture of these, with preferred monomers being styrene and methyl methacrylate. The ratio of monomer(s) to resin is desirably from about 40:60 to about 75:25 and preferably from about 40:60 to about 65:35 by weight.

Another component to the molding composition is fillers. In accordance with the invention the predominant filler is a conductive filler in order to impart electrical conductivity of the final molded product. A preferred filler is graphite particles, in particular, a synthetic crystalline graphite particle, such as currently supplied by Asbury Graphite in Asbury, New Jersey under the designation Asbury 4012. This graphite is characterized as having less than 10% particles greater than 150 microns

and less than 10% smaller than 44 microns in diameter. Other graphite fillers include: Ashbury A99, Ashbury 3243, Ashbury modified 4012, Ashbury 3285, Ashbury 230U; TimrexR KS 75 and 150, and TimrexR KC 44, all sold by TIMCAL of Westlake, Ohio; and Calgraph Sold by SGL Technic Inc of Valencia, California. This filler is used at a loading of at least 50% by weight. Other conductive fillers such as other forms of graphite (including graphite pitch-based fibers), metal particles, or metal coat particles may be used in conjunction with the graphite filler, or even alone. Desirably conductive fillers are at least about 50, about 60, or about 65 weight percent of the molding composition. More desirably the filler is more than about 70 or 71 percent to about 78 weight percent of the molding composition. Alternatively this amount can be expressed as at least about 250 phr, more preferably at least about 275, or even 300 phr. Alternatively stated the conductive fillers are present in an effective amount to result in a bulk conductivity of at least about 40, about 50, about 60, about 70, about 80, about 85, about 90 or about 96 S/cm when measured in accordance with ASTM Test Standard No. F1529-97 for a molded article having a thickness from about 0.060 to about 0.200 inches. Current technology in fuel cell plates uses a bulk conductivity of at least about 55, and preferably at least about 70.

An initiator is another component of the molding composition. The initiator initiates the copolymerization of the resin and the monomer(s). Initiators include any free radical initiator capable of forming radicals in the correct concentration under the molding conditions. They may include peroxides, hydroperoxides, redox systems, diazo compounds, persulfates, perbenzoates etc. The initiators are typically used in amounts of about 0.05 to about 5 weight percent, and more preferably about 0.1 to about 2 weight percent. Alternatively, these amounts can be expressed in parts per hundred parts by weight of resin, i.e. from about 0.5 to about 4.0 phr, preferably from about 0.7 to about 3.0 phr, and most preferably from about 0.8 to about 2.25 phr. Alternatively high temperature initiators such as Di-cup, e.g. dicumyl peroxide can be used for molding applications where higher initiation temperatures are desirable.

An essential component to the improved molding composition is a rheological modifier, which may act to increase the molecular weight such as by chain extension of the resin prepolymer. Suitable modifiers include Group II oxides and hydroxides, such as calcium or magnesium oxide; carbodiamides; aziridines; and polyisocyanates. It is believed that the foregoing modifiers act chemically by co-reacting into the polymer backbone at carboxy or hydroxy sites. Other suitable modifiers include polytetrafluoroethylene (PTFE); perfluoropolyether (PFPE), and polyethylene. These modifiers may act to reduce shear and thus promote flow in the composition during molding. Fumed silica is an example of a substance, which may act mechanically to increase molding viscosity and therefore be a suitable rheological modifier for this invention. Combinations of two or more rheological modifiers may be desirable for optimum properties. In this application they are used to modify the resin structure to prevent phase separation of the resin from the conductive filler (in particular in view of the high loadings of the conductive filler, i.e. over 50% or even 65% by weight or more of graphite). The modifiers are further used in general to enable the achievement of a high definition conductive polymeric fuel cell plate.

Desirably the rheological modifiers are used in an effective amount to prevent phase separation during molding. For the purpose of this application molding will desirably be at pressures from about 400 to about 5000 psi, and preferably from about 2000 to about 3500 psi, and most preferably from about 2500 to about 3000 psi.. Desirable amounts of group II oxides (including group II hydroxides and mixtures of these compounds) is from about 0.1 to about 1 or about 2 weight percent, more desirably from about 0.2 or about 0.3 to about 0.7 or about 0.8 weight percent. This can also be expressed as from about 0.5 to about 4.0 phr, preferably from about 1.0 to about 3.0 phr, and most preferably from about 1.5 to about 2.5 phr. Specific preferred compounds include magnesium oxide, or magnesium hydroxide or calcium oxide. Examples of a suitable magnesium oxide additive is 99% pure magnesium oxide sold under the tradename "Elastomag" from Morton Thiokol, Inc. in Danvers, MA. Other examples include a magnesium oxide dispersion sold under the tradename "pg-9033"

by Plasticolors, and a magnesium hydroxide dispersion also sold by Plasticolors under the tradename "pg-91146". Another suitable magnesium hydroxide is Barcroft, which is a powdered version. Examples of aziridine compounds include polyfunctional aziridines supplied by EIT, Inc. under the trade designation XAMA, including XAMA-2, which is identified as trimethylol propane-tris (beta-(N-aziridinyl) propionate), and, in particular, XAMA-7, which is identified as pentaerythritol-tris-(beta-(aziridinyl) propionate); a product of Sybron Chemicals, under the tradename Ionac including PFAZ-322, identified as a trifunctional aziridine; and including CX-100, a product of Zeneca Resins, identified as a polyfunctional aziridine. Desirable amounts of aziridine and/or polyisocyanate modifiers is from about 1 to about 10 or about 15 weight percent, and more desirably from about 2 or about 3 to about 8 or about 9 weight percent. This can also be expressed as from about 0.5 to about 20 phr, preferably from about 1 to about 17 phr, and most preferably from about 2 to about 15 phr. Polyisocyanates in general are described in more detail in U.S. 5,268,400 column 6, line 59 through column 7, line 17. A specific diisocyanate, which can be used is diphenylmethane diisocyanate such as that sold by ICI Americas of West Deptford, New Jersey, under the tradename "Rubinate" R MF-1780. Additionally, a suitable diisocyanate is Lupranate MP102, solvent free urethane-modified diphenylmethane diisocyanate from BASF. Desirable amounts of polytetrafluoroethylene (PTFE) (and/or perfluoropolyether (PFPE)) is from about 0.5 to about 1 or about 2 weight percent, more desirably from about 0.6 or about 0.7 to about 1.8 or about 1.3 weight percent. This can also be expressed as from about 0.5 to about 20 phr, preferably from about 3 to about 15 phr, and most preferably from about 5 to about 12 phr. A suitable fine particle PTFE powder (having an average particle size by Coulter Counter of less than ____ microns) is sold under the tradename "Marzon #5" by Marshall Products Company of West Chester Pennsylvania. It is preferable to use a linear low-density polyethylene such as sold by Equistar of Houston Texas under the tradename FN 510. It is preferable to use it in amounts of from about 3 to about 20 phr, more preferably from about 4 to about 17, and most preferably from about 5 to about 15 phr. Fumed silica

could be used at from about 0.5 to about 20 phr, preferably from about 1 to 10 phr.

5 Other optional components to a molding composition include urethane based or urethane containing oligomers or polymers, low shrinkage additives like polyvinyl acetate or polyethylene; fibrous reinforcing agents such as cotton glass microfibers or graphite microfibers; flexibilizing agents; mold release agents; polymerization inhibitors to inhibit premature polymerization during storage or the initial stages of molding; viscosity modifiers like fumed silica; and mold lubricant like stearates of calcium, zinc or magnesium.

10 Carbon black may be added to influence the surface conductivity and to change the appearance of the molded product. Suitable carbon blacks include an electrically conductive low residue carbon black having a nitrogen surface area m²/g of 270, a STSA surface Area m²/g of 145 a sieve residue at 35 mesh of 0ppm and at 325 mesh of 20 ppm as sold under the

15 tradename Conductex 975 by Columbia Chemicals of Jamesburg, NJ. Also, suitable conductive carbon black is supplied by Akzo Nobel Chemicals of Chicago, Illinois under the tradename Ketjenblack EC-300 J and EC-600JD. Cabot Corporation of Boston MA also supplies a conductive carbon black. It is noted that polyethylene and fumed silica can function as the rheological

20 modifier in addition to the foregoing functions.

The molding compositions may be formulated and mixed using a variety of mixing conditions including either continuous or batch and using a variety of known mixing equipment. Specific examples are set forth in the example section. The compositions may be advantageously stored for

25 reasonable times before molding. The compositions can be molded by a variety of methods including compression molding and injection molding. The compositions can be molded under typical conditions for these types of molding including at pressures from about 400 to about 5000 psi, and preferably from about 2000 to about 3500 psi, and most preferably from

30 about 2500 to about 3000 psi and temperatures at from about 225 to about 400 degrees Fahrenheit. Dwell times are from about 70 seconds to about four minutes. The compositions are useful for molding complex configurations including thin or intricate conductive articles such as those having a thickness from about 0.050 to about 0.200 inches, and more

preferably from about 0.060 to about 0.150 inches. The compositions are useful for articles having bulk conductivity of at least 40, 50, 60, 70, 80, 85, 90 or even 96 S/cm at a thickness given above. The articles from the composition desirably have tensile strength from about 1500 to about 5000 psi as measured in accordance with ASTM test No.D638 and flexural modulus from about 2500 to about 10,000 psi when tested in accordance with ASTM test no.D790.

Molded products made from the compositions of the present invention are useful for a variety of applications demanding complex configurations, conductivity, as well as strength, and corrosion resistance. One particularly advantageous product which can be made by compression molding is a bipolar plate for use in fuel cells. An example of such a plate is shown in Figure 1. The drawing of this plate is intended to illustrate the molding capabilities of the conductive compound of the present invention. It is not necessarily intended to provide optimal, or even operative, field flow design. It should not limit the invention in any way. The plate 10 includes a fluid flow face with one or more generally parallel and or serpentine flow channels 12. The flow channels receive and transmit fluids through ports 14 and 16 which are in fluid communication with corresponding entry and exit fluid manifolds 18 and 19. The plate has a dimension which will vary from 1 to 20 inches in length and width, and having a thickness of 0.02 to 0.3 inch, with a cross-sectional depth of the flow channel in the range of about 0.005 to 0.080 inch. The cross-sectional width of a land separating adjacent flow channel sections is in the range of 0.01 to 0.1 inch. The plate may include a number of peripheral through holes 20 that act as a manifold for fuel transportation.

Figure 2 illustrates the unassembled components of a fuel cell. This fuel cell has a base unit 12 which includes debossed means to accept a reformer 14 and a fuel cell stack 16 which is comprised of a plurality of bipolar plates 20 which are sandwiched between a stack cap 22 and a stack base 24. The fuel cell further includes a heat exchanger 26. An enclosure 30 provides a leak-proof housing for the unit.

Examples

The following examples use the components set forth below.

-12-

Resin A is Hetron 922 available from Ashland Chemical Co. in Columbus, Ohio. It is a low viscosity epoxy vinyl ester resin. It is about 55 wt.% solids and about 45 wt.% reactive monomer.

5 Resin B is Atlac 382ES from Reichhold Chemicals, Inc. in Research Triangle Park, NC. It is characterized as a bisphenol fumarate resin. It was diluted to about 55 wt.% solids with styrene.

Resin C is Dion 6694 diluted to 55 wt.% solids in styrene. It is available from Reichhold Chemicals, Inc. It is characterized as a modified bisphenol fumarate polyester.

10 Resin D is 42-2641 from Cook Composites and Polymers in Kansas City, MO. It was diluted to 55 wt.% solids with styrene. It is characterized as an unsaturated polyester resin.

15 Resin E is ATLAC 3581-61 from Reichhold Chemicals, Inc. It is characterized as a vinyl ester resin at 19wt%, polyester at 27 wt% and urethane polymer at 4 wt % combined with 50wt% styrene. Thus, it was diluted to 50 wt% solids with styrene.

Resin F is 580-05 from Reichhold Chemicals, Inc. It is characterized as a urethane-modified vinyl ester resin . It was diluted to 54 wt% solids with styrene.

20 Resin G is 9100 from Reichhold Chemicals, Inc. It is characterized as a bisphenol-epoxy vinyl ester. It was diluted to 54-58 wt% solids with styrene.

25 Resin H is Dow Derakane R8084 from Dow Chemicals, Inc. It is characterized as an elastomer-modified vinyl ester resin. It was diluted to 50-60 wt% solids with styrene.

Resin I is 9480-00 from Reichhold Chemicals, Inc. It is characterized as an epoxy novolac vinyl ester. It was diluted to 53.5 wt% solids with styrene.

30 Resin J is Atlac 31-632 from Reichhold Chemicals, Inc. It is an unsaturated isocyanurate vinyl ester resin.

Rheological Modifier A is Elastomag from Morton Thiokol, Inc. in Danvers, MA. It is characterized as 99% pure magnesium oxide.

Rheological Modifier B is a polyisocyanate. The material used in these experiments is 40-7263 from Cook Composites and Polymers. It is

characterized by a NCO content of 17.7 to 20.9, a viscosity of 110-170, a flash point of 87 °F, and a crystallization point of 40 °F.

Rheological Modifier C is RCI RD THL55 (also known as RD-1070) from Reichhold, Inc. It is specifically a polyurethane resin.

5 Rheological Modifier D is Rubinate 1780 available from ICI. It is characterized as a polymeric methylene diphenyl diisocyanate.

Rheological Modifier E is Marzon #5 from Marshall Products Company of West Chester, PA. It is characterized as a finely divided powder polytetrafluorethylene.

10 Rheological Modifier F is FN-510, a linear low density polyethylene

Initiator A is Vazo (2,2-azo bisisobutyronitrile) available from Dupont , I & B Industrial and Biochemical Dept, Wilmington DE.

Initiator B is tert-butyl peroxy isopropyl carbonate (Triginox BPIC) available from Durr Marketing in Pittsburgh, PA.

15 Initiator C is t-butylperbenzoate (TBPB) available from Durr Marketing.

Initiator D is 1,3 di-t-butyl peroxy-3,5,5 trimethylcyclohexane catalyst (Trig 29B75) available from Durr Marketing.

The mold release agent is calcium stearate.

20 Graphite A is a synthetic, crystalline graphite available from Asbury Graphite in Asbury, NJ. It is characterized by having less than 10% greater than 150 microns and less than 10% smaller than 44 microns in diameter. It is available under the designation 4012.

Graphite B is a very fine conductive particulate graphite available from SGL Technic of Valencia, California under the trade designation SGL 02.

25 Graphite C is a conductive particulate graphite available from SGL Technic of Valencia California under the trade designation SGLVFINE.

Graphite D is available from Asbury Graphite in Asbury, NJ. It is a modified version of the 4012 product.

30 Graphite E is a conductive flake graphite available from Asbury Graphite in Asbury, NJ. under the trade designation 3243. It is characterized by having less than 18% greater than 75 microns and less than 65% smaller than 44 microns in diameter.

Graphite F is a conductive flake graphite available from Asbury Graphite in Asbury, NJ. under the trade designation 230U. It is characterized by having 100% smaller than 44 microns in diameter.

5 Graphite G is a synthetic graphite available from Asbury Graphite in Asbury, NJ under the trade designation A99. It is characterized by having less than 3% greater than 44 microns and less than 99 % smaller than 44 microns in diameter.

10 Graphite H is a synthetic graphite available under the designation KS 75, from Timrex America, Inc. It is characterized by having less than 95% greater than 96 microns and less than 95% smaller than 75 microns in diameter.

15 Graphite I is a synthetic graphite available under the designation KS 150, from Timrex America, Inc. It is characterized by having at least 95% less than 180 microns in diameter.

Graphite J is a synthetic graphite available under the designation KC44, from Timrex America, Inc. It is characterized by having at least 90% less than 48 microns in diameter.

20 Carbon Black B is characterized as an electrically conductive low residue carbon black having a nitrogen surface area m²/g of 270, a STSA surface Area m²/g of 145 a sieve residue at 35 mesh of 0ppm and at 325 mesh of 20 ppm as sold under the tradename Conductex 975 by Columbia Chemicals of Jamesburg, NJ.

25 Carbon Black C is conductive carbon black supplied by Cabot Corporation of Boston, MA under the tradename, Black Pearls, while Graphite D is supplied by this company under the designation XC-72.

30 Carbon Black E is conductive carbon black supplied by Akzo Nobel Chemicals of Chicago, Illinois under the tradename Ketjenblack EC-300 J and EC-600JD. EC-300 J has an iodine absorption of 740-840 mg/g; a pore volume of 310-345 cm³/100g and an apparent bulk density of 125-145 kg/m³. EC-600 JD has an iodine absorption of 1000-1150 mg/g; a pore volume of 480-510 cm³/100g and an apparent bulk density of 100-120 kg/m³.

The Glass fibers were from Owens-Corning Fiberglass and are characterized as continuous glass filaments hammermilled into a specific length used as a reinforcing and filler medium.

The inhibitor was 2,6-di-tertbutyl-p-cresol (25% in vinyl toluene).

5 The molding compositions are generally prepared by adding the resin, monomer initiator, inhibitor, mold release agent, and rheological modifier (if present) to a high shear cowels disperser and blending for 2 minutes. The conductive filler is added to the mix in a Baker Perkin Mixer and mixed 15 minutes. When mixing is complete the composition is put in a suitable barrier bag and allowed to mature for approximately one day before molding.

10 The molding parameters for the molding compositions are as follows: Molding temperature for plaques was 295 °F with a molding time of 3 minutes and a charge weight of 173 g. The molding temperature for prototype bipolar plates was 290 °F with a molding time of 3 minutes and a charge weight of 300 g. It was observed that the use of specific
15 thermosetting resins with a conductive filler in combination with various rheological additives (thickeners) improved the bipolar plate composition in regards to having a product which can be used in mass production of electrochemical, e.g. fuel, cell bipolar plates.

20 The results of the formulation changes include non-cracking molding compound, better hot strength out of the mold, lower production costs, shorter cycle times, better overall electrical conductivity, increased mechanical properties, and better rheological characteristics.

25 In Table IA the Control L-23012 suffered from cracking during molding of a plate and had non-uniform conductivity and resistivity along the surface of the plate due to phase separation of the conductive filler and resin during molding. Samples L-23185, L-23120, L-23119 and L-23126 had desirable properties.

30 In Table IB Samples L-23125, L-23186, L-23039 had desirable properties. Samples L-23184 and L-23022 had lower than optimal bulk conductivity and higher than optimal resistivity.

-16-

In Table IC Samples L-23023, L-23063, L-23024, L-323027, and L-23026 had lower than optimal bulk conductivity and higher than optimal resistivity.

- 5 In Table ID Samples L-23209 and L-23215 had good properties. Samples L-23028, L-23210, and L-23211 had lower than optimal bulk conductivity and higher than optimal resistivity.

Table IA

Component	Control L-23012	L-23185	L-23120	L-23119	L-23126
Resin A	30.1g				
Resin B					
Resin C				19.95g	
Resin D		17.13	15.63		23.33
Initiator	0.6g (A)	0.4 (B)	0.4 (B)	0.4 (B)	0.4 (B)
Inhibitor	0.1	0.1	0.1	0.1	0.1
Mold Release	1.2	1.2	1.2	1.2	1.2
Graphite A	68g	75	78	78	
Graphite B					68
Graphite C					
Modifier A	-			0.35g	
Modifier B	-	6.17	4.67		6.97
Glass fibers					
Bulk Conductivity S/cm	85	85	90	90	70
Areal Conductivity S/cm ²	300	260	260	260	220
Tensile psi	3500	3700	3600	3100	3500
Flexural psi	4100	5500	4300	3500	4200
Resistivity OHMS/M ²		70.9	87.51	71.2	37.7

Table IB

Component	L-23125	L-23186	L-23039	L-23184	L-23022
Resin A					
Resin B			19.95		29.95
Resin C		22.65		27.65	
Resin D	23.33g				
Initiator	04 (B)	0.4 (C)	0.4 (B)	0.4 (C)	0.4 (B)
Inhibitor	0.1	0.1	0.1	0.1	0.1
Mold Release	1.2	1.3	1.2	1.3	1.2
Graphite A	34	70	68	70	68
Graphite B	34				
Graphite C					
Modifier A		0.55	0.35	0.55	0.35
Modifier B	6.97				
Glass fibers		5	10		
Bulk Conductivity S/cm	70	70	65	45	40
Areal Conductivity S/cm ²	210	210	200	140	140
Tensile psi	3400	3000	2800	3000	4100
Flexural psi	4200	3700	3800	4000	5000
Resistivity OHMS/M ²	58.13	123.8	117.6	155.6	222.1

Table IC

Component	L-23023	L-23063	L-23024	L-23027	L-23026
Resin A					
Resin B	29.95	29.95	29.95		
Resin C				29.95	29.950
Resin D					
Initiator	0.4 (C)	0.4 (B)	0.4 (D)	0.4 (C)	0.4 (B)
Inhibitor	0.1	0.1	0.1	0.1	0.1
Mold Release	1.2	1.2	1.2	1.2	1.2
Graphite A	68	68	68	68	68
Graphite B					
Graphite C					
Modifier A	0.35	0.35	0.35	0.35	0.35
Modifier B					
Glass fibers					
Bulk Conductivity S/cm	40	40	35	30	30
Areal Conductivity S/cm ²	140	120	130	90	90
Tensile psi	4200	3500	3100	4700	4300
Flexural psi	4900	4200	3400	6000	5300
Resistivity OHMS/M ²	205.9	-	181.7	320.9	246.8

Table 1D

Component	L-23028	L-23209	L-23210	L-23211	L-23215
Resin A					
Resin B					
Resin C	29.95			28.65	22.65
Resin D		21.49	21.49		
Initiator	0.4 (D)	0.4(B)	0.4 (B0	0.4 (B)	0.4 (B)
Inhibitor	0.1	0.1	0.1	0.1	0.1
Mold Release	1.2	1.2	1.2	1.3	1.3
Graphite A	68	42	42	43	70
Graphite B		26			
Graphite C	0.35		26	26	
Modifier A	0.35			0.55	0.55
Modifier B		8.81	8.81		
Glass fibers					
Bulk Conductivity S/cm	30	77	25	45	79
Areal Conductivity S/cm ²	100	227	74	132	233
Tensile psi	3800	2700	3900	3000	2600
Flexural psi	5100	3900	5500	4500	4300
Resistivity OHMS/M ²	220.9	62.02	377.8	186.46	102.74

Table 2A

Component	23012	23039	23022	23023	23063
Resin A	100				
Resin B		100	100	100	100
Initiator A	1.99				
Initiator B		2.01	1.34		1.34
Initiator C				1.34	
Inhibitor	0.33	0.50	0.33	0.33	0.33
Release Agent	3.99	6.02	4.01	4.01	4.01
Graphite A	225.91	340.85	227.05	227.05	227.05
Modifier A			1.17	1.17	1.17
Fiber A		50.13			
Bulk Conductivity S/cm	85	65	40	40	40
Areal Conductivity S/cm ²	300	200	140	140	120
Tensile psi	3500	2800	4100	4200	3500
Flexural psi	4100	3800	5000	4900	4200

5

10

15

Table 2B

Component	23024	23119	23186	23184	23027
Resin B	100				
Resin C		100	100	100	100
Initiator B		2.01			
Initiator C			1.77	1.45	1.34
Initiator D	1.34				
Inhibitor	0.33	0.50	0.44	0.36	0.33
Release Agent	4.01	6.02	5.74	4.70	4.01
Graphite A	227.05	390.98	309.05	253.16	227.05
Modifier A	1.17	1.75	2.43	1.99	1.17
Fibers A			22.08		
Bulk Conductivity S/cm	35	90	70	45	30
Areal Conductivity S/cm ²	130	260	210	140	90
Tensile psi	135	260	210	140	90
Flexural psi	3100	3100	3000	3000	4700

Table 2C

Component	23026	23028	23211	23215	23185
Resin C	100	100	100	100	
Resin D					100
Initiator B	1.34		1.40	1.77	2.34
Initiator D		1.34			
Inhibitor	0.33	0.33	0.35	0.44	0.58
Release Agent	4.01	4.01	4.54	5.74	7.01
Graphite A	227.05	227.05	150.09	309.05	437.83
Graphite C			90.75		
Modifier A	1.17	1.17	1.92	2.43	
Modifier B					36.02
Fiber B				22.08	
Bulk Conductivity S/cm	30	30	45	79	85
Areal Conductivity S/cm ²	90	100	132	233	260
Tensile psi	4300	3800	3000	2600	3700
Flexural psi	5300	5100	4500	4300	5500

Table 2D

Component	23120	23126	23125	23209	23210
Resin D	100	100	100	100	100
Initiator B	2.56	1.71	1.71	1.86	1.86
Inhibitor	0.64	0.43	0.43	0.43	0.47
Release Agent	7.68	5.14	5.14	5.58	5.58
Graphite A	499.04		145.74	195.44	195.44
Graphite B		291.47	145.74	120.99	
Graphite C					120.99
Modifier B	29.88	29.88	29.88	41.00	41.00
Bulk Conductivity S/cm	90	70	70	77	25
Areal Conductivity S/cm ²	260	220	210	227	74
Tensile psi	3600	3500	3400	2700	3900
Flexural psi	4300	4200	4200	3900	5500

-25-

Table 3A

Component	23227	23236	23237	23274	23275
Resin D	100	100	100	100	100
Initiator B	1.56	1.44	1.51	2.34	2.34
Inhibitor	0.52	0.48	0.50	0.58	0.58
Release Agent	6.24	5.77	6.06	7.01	7.01
Graphite A	390.02	350.96	368.50	420.32	420.32
Carbon A				17.51	
Modifier B	21.68	22.12	28.22	36.02	36.02
Fiber C					11.68
Bulk Conductivity S/cm	90				
Tensile psi	2672				
Flexural psi	6543				
Density g/cm ³		1.67	1.75	1.77	
Shrink mils/in		-1.5	-1.83	-2.25	

5

10

15

20

Table 3B

Component	23292	23293	23343	23344	23345
Resin D	100	100	100	100	100
Initiator B	1.48	1.56	1.44	1.29	1.20
Inhibitor	0.49	0.52	0.48	0.43	0.40
Release Agent	5.93	6.24	5.75	5.14	4.80
Graphite A	370.74	395.22	349.78	299.91	272.22
Modifier B	15.67	16.48	21.71	21.68	21.70
Bulk Conductivity S/cm				72.5	58
Tensile psi		2170	2547	2448	2679
Flexural psi		4616	6503	5423	5897
Density g/cm ³	1.67	1.73	1.71		
Shrink mils/in	-2.17	-2.08	-2		

Table 3C

Component	23346	23347	23348	23349	23350
Resin D	100	100	100	100	100
Initiator B	1.09	1.03	0.95	0.90	0.84
Inhibitor	0.36	0.34	0.32	0.30	0.28
Release Agent	4.37	4.13	3.80	3.61	3.36
Graphite A	236.79	216.57	190.11	174.70	154.19
Modifier B	21.68	21.69	21.67	21.69	21.67
Tensile psi	3083	3053	2923	3107	3470
Flexural psi	5715	5766	5666	5398	5378
Density g/cm ³	1.75	1.71	1.73	1.7	1.64
Shrink mils/in	-3	-3.5	-3.33	-4	-5

-27-

Table 3D

Component	23351	23352	23360	23361	23362
Resin D	100	100	100	100	100
Initiator B	0.80	0.75	2.27	2.21	2.14
Inhibitor	0.27	0.25	0.57	0.55	0.54
Release Agent	3.22	3.02	6.81	6.62	6.43
Graphite A	142.05	125.75	425.41	413.45	402.14
Modifier B	21.68	21.73	32.16	28.45	24.93
Bulk Conductivity S/cm					85.5
Tensile psi	2787	2629			2155
Flexural psi	6167	5998			6017
Density g/cm ³	1.72	1.71	1.65	1.73	1.68
Shrink mils/in	-1.67	-1.83	-1.42	-1.42	-0.67

5

10

15

20

Table 4A

Component	23364	23365	23366	23367	23368
Resin D	100	100	100	100	100
Monomer A	9.72	8.18	7.05	6.20	5.53
Initiator B	1.46	1.23	1.06	0.93	0.83
Inhibitor	0.49	0.41	0.35	0.31	0.28
Release Agent	5.83	4.91	4.23	3.72	3.32
Graphite A	340.30	265.85	211.57	170.54	138.31
Modifier B	28.43	28.34	28.35	28.37	28.35
Bulk Conductivity S/cm	55.99	36.57	32.86	18.37	13.59
Tensile psi	2647	2697	2701	2880	2992
Flexural psi	6044	6131	6149	7002	7338
Density g/cm ³	1.75	1.74	1.71	1.72	1.71
Shrink mils/in	-2.5	-2.83	-3.17	-3.33	-3.83

5

10

15

20

Table 4B

Component	23369	23370	23371	23372	23373
Resin D	100	100	100	100	100
Initiator B	1.36	1.15	1.00	0.89	0.79
Inhibitor	0.45	0.38	0.33	0.30	0.26
Release Agent	5.42	4.61	4.01	3.55	3.18
Graphite A	316.17	249.52	200.33	162.48	132.45
Modifier B	28.27	28.21	28.21	28.21	28.21
Bulk Conductivity S/cm	49.49	27.74	25.05	14.01	8.12
Tensile psi	2974	3358	3014	2952	3154
Flexural psi	6394	6099	6520	6312	6071
Density g/cm ³	1.72	1.76	1.69	1.73	1.72
Shrink mils/in	-3.5	-2.5	-2.83	-3.17	-3.53

5

10

15

20

Table 4C

Component	23443	23444	23445	23466	23467
Resin D	100	100	100	100	100
Initiator B	1.84	1.72	1.56	1.81	1.54
Inhibitor	0.46	0.43	0.39	0.45	0.39
Release Agent	5.52	5.15	4.69	5.44	4.62
Graphite A	322.14	291.85	253.91	317.17	250.29
Modifier B	30.23	30.04	30.08	28.23	28.23
Bulk Conductivity S/cm	36	21.2	15	39	21
Tensile psi				2312	2765
Flexural psi				6154	5994
Density g/cm ³	1.76	1.76	1.75	1.75	1.73
Shrink mils/in	-2	-2	-2.33	-1.67	-1.83

Table 4D

Component	23468	23469	23470	23471	23505
Resin D	100	100	100	100	100
Initiator B	1.69	1.75	1.95	2.11	1.48
Inhibitor	0.42	0.44	0.49	0.53	0.37
Release Agent	5.08	5.25	5.85	6.33	4.45
Graphite A	287.77	284.46	331.55	369.39	241.01
Modifier B	28.23	28.23	28.23	28.23	23.47
Fiber D		17.51	19.50	21.11	
Bulk Conductivity S/cm	34		45	60	61
Tensile psi	2466	2804	1797	2010	2821
Flexural psi	5272	7390	6682	4726	4898
Density g/cm ³	1.71	1.6	1.62	1.58	1.75
Shrink mils/in	-2.33	-2	-1.42	-1.67	-2.5

5

10

15

20

Table 5A

Component	23506	23507	23508	23509	23510
Resin D	100	100	100	100	100
Initiator B	1.63	1.75	1.45	1.59	1.70
Inhibitor	0.41	0.44	0.36	0.40	0.43
Release Agent	4.89	5.24	4.34	4.77	5.11
Graphite A	277.10	305.41	235.17	270.38	298.00
Modifier B	23.47	23.47	20.48	20.48	20.48
Bulk Conductivity S/cm	55	45	52	60	65
Tensile psi	2680	2645			2483
Flexural psi	4556.7	5264.4			4773.67
Density g/cm ³	1.74	1.74	1.79	1.78	1.76
Shrink mils/in	-2.5	-2.33	-2.33	-2.42	-1.75

5

10

15

20

Table 5B

Component	23566	23567	23568	23581	23582
Resin D.	100	100	100	100	100
Initiator B	1.85	1.79	1.75	1.77	1.83
Inhibitor	0.46	0.45	0.44	0.44	0.46
Release Agent	5.54	5.38	5.26	5.30	5.50
Graphite A	346.42	336.32	328.95	313.33	329.82
Modifier B				20.48	20.48
Modifier D	7.62	4.48	2.19		
Bulk Conductivity S/cm		92	94		
Density g/cm ³	1.77	1.78	1.75	1.79	1.76
Shrink mils/in	-1.67	-1.25	-1.25	-1.67	-1.58

5

10

15

20

-34-

Table 5C

Component	23583	23584	23585	23592	23593
Resin D	100	100	100	100	100
Initiator B	1.90	1.98	2.07	1.88	1.97
Inhibitor	0.48	0.50	0.52	0.47	0.49
Release Agent	5.71	5.95	6.20	5.63	5.91
Graphite A	347.62	366.88	387.80	352.11	369.46
Modifier B	20.48	20.48	20.48		
Modifier D				9.39	14.78
Bulk Conductivity S/cm				88	59
Density g/cm ³	1.78	1.75	1.71	1.71	1.71
Shrink mils/in	-1.5	-1.25	-1.25	-1.67	-1.67

5

10

15

20

25

-35-

Table 5D

Component	23594	23721	23722	23723	23724
Resin D	100	100	100	100	100
Initiator B	2.07	2.19	2.24	1.94	2.00
Inhibitor	0.52	0.55	0.56	0.48	0.50
Release Agent	6.22	6.57	6.71	5.82	6.00
Graphite A	388.6	410.51	419.23	354.03	365.18
Modifier B		27.53	30.24	22.70	26.56
Modifier D	20.73				
Bulk Conductivity S/cm		86	93	68	65
Density g/cm ³	1.71	1.74	1.77	1.77	1.78
Shrink mils/in	-1.25	-1.42	-1.08	-1.5	-1.25

5

10

15

20

25

Table 6A

Component	23725	23726	23727	23728	23729
Resin D	100	100	100	100	100
Initiator B	2.14	1.90	2.14	1.90	2.14
Inhibitor	0.54	0.48	0.54	0.48	0.54
Release Agent	6.43	5.71	6.43	5.71	6.43
Graphite D	402.14	347.62			
Graphite E			402.14	347.62	
Graphite F					402.14
Modifier B	24.93	20.48	24.93	20.48	24.93
Bulk Conductivity S/cm	96	75	81	62	
Density g/cm ³	1.77	1.78	1.81	1.8	
Shrink mils/in	-1.67	-2.33	-0.83	-1	

5

10

15

20

-37-

Table 6B

Component	23730	23731	23732	23733	23734
Resin D	100	100	100	100	100
Initiator B	1.90	2.14	1.90	2.14	2.14
Inhibitor	0.48	0.54	0.48	0.54	0.54
Release Agent	5.71	6.43	5.71	6.43	6.43
Graphite A				249.33	249.33
Graphite E				152.82	
Graphite F	347.62				152.82
Graphite G		402.14	347.62		
Modifier B	20.48	24.93	20.48	24.93	24.93
Bulk Conductivity S/cm		32	30	48	25
Density g/cm ³				1.81	1.81
Shrink mils/in				-1.33	-1.83

5

10

15

20

-38-

Table 6C

Component	23735	23736	23737	23738	23739
Resin D	100	100	100	100	100
Initiator B	2.14	2.14	1.90	1.90	1.90
Inhibitor	0.54	0.54	0.48	0.48	0.48
Release Agent	6.43	6.43	5.71	5.71	5.71
Graphite A	249.33	249.33	215.52	215.52	215.52
Graphite D		152.82			
Graphite E			132.10		
Graphite F	152.82			132.10	
Graphite G	152.82				132.10
Modifier B	24.93	24.93	20.48	20.48	20.48
Bulk Conductivity S/cm	38	90	50	26	31
Density g/cm ³	1.79	1.67	1.79	1.8	1.8
Shrink mils/in	-2.08	-1.58	-1.83	-2.33	-2.67

5

10

15

Table 6D

Component	23740	23755	23756	23757	23758
Resin D	100	100	100	100	100
Initiator B	1.90	2.17	2.20	1.93	1.95
Inhibitor	0.48	0.54	0.55	0.48	0.49
Release Agent	5.71	6.52	6.61	5.78	5.85
Graphite A	215.52	407.61	413.22	341.81	356.10
Graphite D	132.10				
Modifier B	20.48	23.91	22.87	19.52	18.54
Modifier D		2.72	5.51	2.41	4.88
Bulk Conductivity S/cm	68	70	97	92	89
Density g/cm ³	1.75	1.77	1.67	1.79	1.79
Shrink mils/in	-1.83	-1.83	-1.83	-2	-2.17

5

10

15

20

Table 7A

Component	23803	23804	23805	23806	23830
Resin D	100	100	100	100	100
Initiator B	2.06	2.09	2.16	2.19	2.16
Inhibitor	0.52	0.52	0.54	0.55	0.54
Release Agent	6.19	6.27	6.49	6.58	6.49
Graphite A	376.29	381.20	394.59	405.48	394.59
Modifier B	25.26	25.59	25.59	26.30	30.00
Modifier E	5.15	6.53	10.81	6.85	6.76
Bulk Conductivity S/cm	62	83	83	90	
Density g/cm ³	1.77	1.77	1.76	1.77	1.79
Shrink mils/in	-1.83	-1.50	-1.33	-1.67	-1.58

Table 7B

Component	23831	23832	23833	23834	23835
Resin D	100	100	100	100	100
Initiator B	2.11	2.18	2.23	2.09	2.09
Inhibitor	0.53	0.54	0.56	0.52	0.52
Release Agent	6.33	6.54	6.69	6.27	6.27
Graphite A	385.22	397.82	406.69		
Graphite H				381.20	
Graphite I					381.20
Modifier B	25.59	25.61	25.63	25.59	25.59
Modifier E		6.81	6.96	6.53	6.53
Density g/cm ³	1.74	1.76	1.72		
Shrink mils/in	-1.42	-1.33	-1.25		

Table 7C

Component	23836	23837	23838	23839	23840
Resin D	100	100	100	100	100
Initiator B	2.09	2.24	2.24	2.24	2.24
Inhibitor	0.52	0.56	0.56	0.56	0.56
Release Agent	6.27	6.71	6.71	6.71	6.71
Graphite A		408.28	408.28	408.28	408.28
Graphite J	381.20				
Carbon B		0.56			
Carbon C			0.56		
Carbon D				0.56	
Carbon E					0.56
Modifier B	25.59	25.56	25.56	25.56	25.56
Modifier E	6.53	6.99	6.99	6.99	6.99
Modifier F		8.39	8.39	8.39	8.39
Density g/cm ³		1.77	1.80	1.76	1.74
Shrink mils/in		-1.08	-0.92	-1.17	-1.08

5

10

15

20

-42-

Table 7D

Component	23878	23879	23880	23881	23896
Resin D	100	100	100	100	100
Initiator B	2.26	2.37	2.28	2.39	1.48
Inhibitor	0.57	0.59	0.57	0.60	0.49
Release Agent	6.79	7.11	6.83	7.16	5.93
Graphite A	418.55	444.31	421.41	447.49	370.74
Modifier B	25.57	25.59	25.57	25.60	5.68
Modifier C					9.99
Modifier E			7.12	7.46	
Modifier F	11.88	12.44	5.69	5.97	

5

Table 8A

Component	23297	23301	23302	23363	23422
Resin E	100	100	100	100	100
Initiator B	1.56	1.38	1.33	1.06	1.75
Inhibitor	0.52	0.46	0.44	0.35	0.58
Release Agent	6.24	5.50	5.31	4.24	7.00
Graphite A	395.22	343.88	331.86	240.03	466.74
Modifier B	5.98	2.66	1.28	2.65	2.68
Modifier C	10.50	4.63	2.26	4.66	4.67
Bulk Conductivity S/cm		72.5		35	
Density g/cm ³		1.62		1.53	1.6
Shrink mils/in		-2.33		-1.33	-0.92

5

Table 8B

Component	23423	23452	23453	23454	23455
Resin D		50.03	60.00	70.03	80.00
Resin E	100				
Resin F		49.97	40.00	29.97	20.00
Initiator B	2.40	2.14	2.14	2.14	2.14
Inhibitor	0.80	0.54	0.54	0.54	0.54
Release Agent	9.61	6.43	6.43	6.43	6.43
Graphite A	680.54	402.14	402.14	402.14	402.14
Modifier B	2.64	24.93	24.93	24.93	24.93
Modifier C	4.64				
Bulk Conductivity S/cm		63	70.5	70	83.5
Tensile psi		2441	2497	2404	2561
Flexural psi		5030	5126	4284	5391
Density g/cm ³	1.47	1.71	1.74	1.75	1.66
Shrink mils/in	-0.25	-1.17	-1.58	-1.67	-1.42

10

15

Table 8C

Component	23530	23531	23646	23647	23648
Resin F	100	100			
Resin G			100	100	100
Initiator B	1.85	1.79	1.81	1.91	2.02
Inhibitor	0.46	0.45	0.45	0.48	0.50
Release Agent	5.54	5.38	5.42	5.72	6.06
Graphite A	346.42	336.32	338.75	357.65	378.60
Modifier B			5.24	11.11	17.62
Modifier D	7.62	4.48			
Bulk Conductivity S/cm			86	58	46
Tensile psi	2305.56	2155.56			
Flexural psi	4548.8	4421.3			
Density g/cm ³	1.69	1.75	1.71	1.72	1.65
Shrink mils/in	-0.42	-1.67	-1.58	-1.42	-1.33

5

10

15

20

Table 8D

Component	23649	23650	23651	23688
Resin D				53.96
Resin I	100	100	100	
Resin J				46.04
Initiator B	1.75	1.77	1.79	
Initiator D				2.08
Inhibitor	0.44	0.44	0.45	0.52
Release Agent	5.26	5.31	5.38	6.25
Graphite A	328.95	331.86	336.32	385.42
Modifier B				15.63
Modifier D	2.19	3.10	4.48	
Modifier F				10.94
Bulk Conductivity S/cm	93	79	64	
Density g/cm ³	1.77	1.74	1.73	
Shrink mils/in	-1.5	-1.08	-1.5	

While in accordance with the Patent Statutes, the best mode and preferred embodiment have been set forth, the scope of the invention is not
5 limited thereto, but rather by the scope of the attached claims.

What is claimed is:

1. A composition comprising

- 5 a) an unsaturated prepolymer resin which comprises one or more of
unsaturated polyester and vinyl ester resin;
 b) an unsaturated material copolymerizable with said resin and
including a terminal ethylene group;
 c) at least 50% by total weight of the composition comprising an
conductive filler;
10 d) an initiator to initiate said copolymerization; and
 e) an effective amount of a rheological modifier to prevent phase
separation between said resin and said conductive filler during molding, said
rheological modifier being one or more compositions selected from the group
consisting of Group II oxides and hydroxides, carbodiamides, aziridines,
15 polyisocyanates, polytetrafluoroethylene, perfluoropolyether, polyethylene
and fumed silica, and clays.

20 2. A composition as set forth in claim 1 wherein the effective amount of said
rheological modifier is from about 0.5 % to about 15 % by total weight of the
system.

25 3. A composition as set forth in claim 2 wherein the conductive filler is a
particulate or flake filler and the amount of said conductive filler is at least 60
weight percent .

4. A composition as set forth in claim 3 wherein the conductive filler is a
graphite filler and the amount of said conductive filler is at least 65 weight
percent.

30 5. A composition as set forth in claim 1, wherein said rheological modifier
comprises magnesium oxide and/or calcium oxide and said effective amount
is from about 0.1 to about 2 weight percent based on the weight of said
composition.

6. A composition as set forth in claim 1, wherein said rheological modifier is one or more of aziridine, carbodiimide, and polyisocyanate and said effective amount is from about 1 to about 10 weight percent based on the weight of said composition.

5

7. A composition as set forth in claim 1, wherein said effective amount of rheological modifier is an effective amount to prevent cracking of a part molded at a pressure from about 400 to about 2000 psi and to a thickness of from about 0.050 to about 0.200 inches.

10

8. A composition as set forth in claim 1, wherein said modifier comprises one or more of polytetrafluoroethylene, perfluoropolyether and said effective amount is from about 0.1 to about 5 weight percent based on the weight of said molding composition.

15

9. A composition as set forth in claim 1, wherein said rheological modifier is polyisocyanate and said effective amount is from about 2 to about 8 weight percent based on the weight of said molding composition.

20

10. A composition as set forth in claim 4 wherein said conductive filler is a synthetic crystalline graphite particle and said unsaturated prepolymer resin is one or more resins selected from the group consisting of epoxy vinyl resin, bisphenol fumarate resin, modified bisphenol fumarate polyester resin, unsaturated polyester resin, urethane-modified vinyl ester resin, bisphenol-epoxy vinylester resin, elastomer-modified vinyl ester resin, epoxy novolac vinyl ester resin and unsaturated isocyanurate vinyl ester resin.

25

11. A composition as set forth in claim 10 wherein said copolymerizable material is one or more monomers selected from the group consisting of styrene, alpha-methyl styrene, chloro-styrene, vinyl toluene, divinyl benzene, diallylphthalate, and methyl methacrylate, and mixture thereof.

30

12. A composition as set forth in claim 11 wherein said copolymerizable material is one or more monomers selected from the group consisting of styrene and methyl methacrylate.
- 5 13. A composition as set forth in claim 12 wherein said initiator is a free radical initiator.
- 10 14. A composition as set forth in claim 13 wherein said initiator is selected from the group consisting of peroxides, hydroperoxides, redox systems, diazo compounds, persulfates, and perbenzoates, and is used in amounts of about 0.05 to about 5 weight percent based on the total weight of the system.
- 15 15. A composition as set forth in claim 14 further comprising carbon black.
16. A composition as set forth in claim 14 further comprising reinforcing fillers.
- 20 17. An electrochemical cell flow field plate comprising a molded thermosetting resin composition having a thickness from about 0.050 to about 0.200 inches and a bulk conductivity of at least 55 S/cm, said molded resin composition being the reaction product of at least:
- 25 a) an unsaturated prepolymer resin which comprises one or more of unsaturated polyester and vinyl ester resin;
- b) an unsaturated material copolymerizable with said resin and including a terminal ethylene group;
- 30 c) at least 50% by total weight of the composition comprising an conductive filler;
- d) an initiator to initiate said copolymerization; and
- e) an effective amount of a rheological modifier to prevent phase separation between said resin and said conductive filler during molding, said rheological modifier being one or more compositions selected from the group consisting of Group II oxides and hydroxides, carbodiamides, aziridines,

polyisocyanates, polytetrafluoroethylene, perfluoropolyether, polyethylene, clays and fumed silica.

5 18. An electrochemical cell flow field plate as set forth in claim 17 wherein the effective amount of said rheological modifier is from about 0.5 % to about 15 % by total weight of the system.

10 19. An electrochemical cell flow field plate as set forth in claim 18 wherein the conductive filler is a particulate filler and the amount of said conductive filler is at least 60 weight percent .

15 20. An electrochemical cell flow field plate as set forth in claim 19 wherein the filler is a graphite filler and the amount of said conductive filler is at least 65 weight percent.

21. An electrochemical cell flow field plate as set forth in claim 17, wherein said rheological modifier comprises magnesium oxide and/or calcium oxide and said effective amount is from about 0.1 to about 2 weight percent based on the weight of said composition.

20 22. An electrochemical cell flow field plate as set forth in claim 17, wherein said rheological modifier is one or more of aziridine and polyisocyanate and said effective amount is from about 1 to about 10 weight percent based on the weight of said composition.

25 23. An electrochemical cell flow field plate as set forth in claim 17, wherein said effective amount of rheological modifier is an effective amount to prevent cracking of a part molded at a pressure from about 400 to about 5000 psi and to a thickness of from about 0.050 to about 0.200 inches.

30 24. An electrochemical cell flow field plate as set forth in claim 17, wherein said modifier comprises one or more of polytetrafluoroethylene, perfluoropolyether and said effective amount is from about 0.1 to about 5 weight percent based on the weight of said molding composition.

- 5 25. An electrochemical cell flow field plate as set forth in claim 17, wherein said rheological modifier is polyisocyanate and said effective amount is from about 2 to about 8 weight percent based on the weight of said molding composition.
- 10 26. An electrochemical cell flow field plate as set forth in claim 20 wherein said conductive filler is a synthetic crystalline graphite particle and said unsaturated prepolymer resin is one or more resins selected from the group consisting of epoxy vinyl resin, bisphenol fumarate resin, modified bisphenol fumarate polyester resin, unsaturated polyester resin, urethane modified vinyl ester resin, urethane-modified vinyl ester resin, bisphenol-epoxy vinyl ester resin, elastomer-modified vinyl ester resin, epoxy novolac vinyl ester resin and unsaturated isocyanurate vinyl ester resin.
- 15 27. An electrochemical cell flow field plate as set forth in claim 26 wherein said copolymerizable material is one or more monomers selected from the group consisting of styrene, alpha-methyl styrene, chloro-styrene, vinyl toluene, divinyl benzene, diallylphthalate, and methyl methacrylate, and mixtures thereof.
- 20 28. An electrochemical cell flow field plate as set forth in claim 27 wherein said copolymerizable material is one or more monomers selected from the group consisting of styrene and methyl methacrylate.
- 25 29. An electrochemical cell flow field plate as set forth in claim 28 wherein said initiator is a free radical initiator.
- 30 30. An electrochemical cell flow field plate as set forth in claim 29 wherein said initiator is selected from the group consisting of peroxides, hydroperoxides, redox systems, diazo compounds, persulfates, and perbenzoates, and is used in amounts of about 0.05 to about 5 weight percent based on the total weight of the system.

31. An electrochemical cell flow field plate as set forth in claim 30 further comprising carbon black.

5 32. An electrochemical cell flow field plate as set forth in claim 30 further comprising reinforcing fillers.

33. A conductive molding composition comprising:

a) 100 parts of an unsaturated prepolymer resin which comprises one or more of unsaturated polyester and vinyl ester resin;

10 b) an unsaturated monomer selected from the group consisting of styrene, alpha-methyl styrene, chloro-styrene, vinyl toluene, divinyl benzene, diallylphthalate, and methyl methacrylate, and mixture thereof; wherein the ratio of monomers to unsaturated prepolymer resin is from about 40:60 to about 72:25 by weight of the a and b,

15 c) at least about 225 phr of an conductive filler such that a molded product made from said composition has a bulk conductivity of at least about 55 S/cm when measured in accordance with ASTM Test No. F1529-97;

d) from about 0.5 to about 4.0 phr of an initiator to initiate said copolymerization; and

20 e) from about 0.5 to about 20 phr of a rheological modifier which is one or more compositions selected from the group consisting of Group II oxides and hydroxides, carbodiamides, aziridines, polyisocyanates, polytetrafluoroethylene, perfluoropolyether, polyethylene, clay and fumed silica and mixtures thereof.

25

34. A conductive molding composition as set forth in claim 33 wherein said prepolymer resin is selected from the group consisting of epoxy vinyl resin, bisphenol fumarate resin, modified bisphenol fumarate polyester resin, unsaturated polyester resin, urethane modified vinyl ester resin, urethane-
30 modified vinyl ester resin, bisphenol-epoxy vinylester resin, elastomer-modified vinyl ester resin, epoxy novolac vinyl ester resin and unsaturated isocyanurate vinyl ester resin.

35. A conductive molding composition as set forth in claim 34 wherein the conductive filler is a particulate or flake filler and the amount of said conductive filler is at least 250 phr .
- 5 36. A conductive molding composition as set forth in claim 35 wherein the conductive filler is a graphite filler and the amount of said conductive filler is at least 275 phr.
- 10 37. A conductive molding composition as set forth in claim 33, wherein said rheological modifier comprises magnesium oxide and/or calcium oxide and said effective amount is from about 0.5 to about 20 phr.
- 15 38. A conductive molding composition as set forth in claim 33, wherein said rheological modifier is one or more of aziridine, carbodiimide and polyisocyanate and said effective amount is from about 0.5 to about 20 phr.
- 20 39. A conductive molding composition as set forth in claim 33, wherein said modifier comprises one or more of polytetrafluoroethylene, perfluoropolyether and said effective amount is from about 0.5 to about 20 phr.
- 25 40. A conductive molding composition as set forth in claim 33, wherein said rheological modifier is polyisocyanate and said effective amount is from about 0.5 to about 20phr.
- 30 41. A conductive molding composition as set forth in claim 33 wherein said copolymerizable material is one or more monomers selected from the group consisting of styrene and methyl methacrylate.
42. A conductive molding composition as set forth in claim 33 wherein said initiator is selected from the group consisting of peroxides, hydroperoxides, redox systems, diazo compounds, persulfates, and perbenzoates, and is used in amounts of about 0.05 to about 20phr.

43. A conductive molding composition as set forth in claim 42 further comprising carbon black.

44. A conductive molding composition in claim 43 further comprising reinforcing fillers.

45. A molded conductive article comprising the cured reaction product of:

a) 100 parts of an unsaturated prepolymer resin, which comprises one or more of unsaturated polyester and vinyl ester resin;

b) an unsaturated monomer selected from the group consisting of styrene, alpha-methyl styrene, chloro-styrene, vinyl toluene, divinyl benzene, diallylphthalate, and methyl methacrylate, and mixture thereof, wherein the ratio of monomers to unsaturated prepolymer resin is from about 40:60 to about 72:25 by weight of the two components,

c) at least about 225 phr of a conductive filler such that said composition has a bulk conductivity of at least about 55 S/cm when measured in accordance with ASTM Test No. F1529-97;

d) from about 0.5 to about 4.0 phr of an initiator to initiate said copolymerization; and

e) from about 0.5 to about 20 phr of a rheological modifier which is one or more compositions selected from the group consisting of Group II oxides and hydroxides, carbodiamides, aziridines, polyisocyanates, polytetrafluoroethylene, perfluoropolyether, polyethylene, clay and fumed silica and mixtures thereof.

46. A molded conductive article as set forth in claim 45 wherein said initiator is selected from the group consisting of peroxides, hydroperoxides, redox systems, diazo compounds, persulfates, and perbenzoates, and is used in amounts of about 0.5 to about 4phr.

47. A molded conductive article as set forth in claim 46 further comprising carbon black.

48. A molded conductive article in claim 46 further comprising reinforcing fillers.

5 49. A molded conductive product as set forth in claim 45 wherein said unsaturated prepolymer resin is one or more resins selected from the group consisting of epoxy vinyl resin, bisphenol fumarate resin, modified bisphenol fumarate polyester resin, unsaturated polyester resin, urethane modified vinyl ester resin, urethane-modified vinyl ester resin, bisphenol-epoxy vinyl ester resin, elastomer-modified vinyl ester resin, epoxy novolac vinyl ester resin and unsaturated isocyanurate vinyl ester resin.

10 50. A method of molding highly loaded polymer which is the reaction product of a composition comprising:

- 15 a) an unsaturated prepolymer resin which comprises one or more of unsaturated polyester and vinyl ester resin;
- b) an unsaturated material monomer copolymerizable with said resin and including a terminal ethylene group;
- c) at least 50% by total weight of the composition comprising a conductive filler;
- 20 d) an initiator to initiate said copolymerization;

said method comprising the addition prior to curing of a rheological agent selected from the group comprising Group II oxides and hydroxides; carbodiamides; aziridines; polyisocyanates; polytetrafluoroethylene (PTFE); perfluoropolyether (PFPE), polyethylene, clay, and fumed silica ; and

25 subsequently molding said composition under heat and pressure to initiate cure and form said article.

51. A method as set forth in claim 50 wherein said molding is either compression molding or injection molding.

30


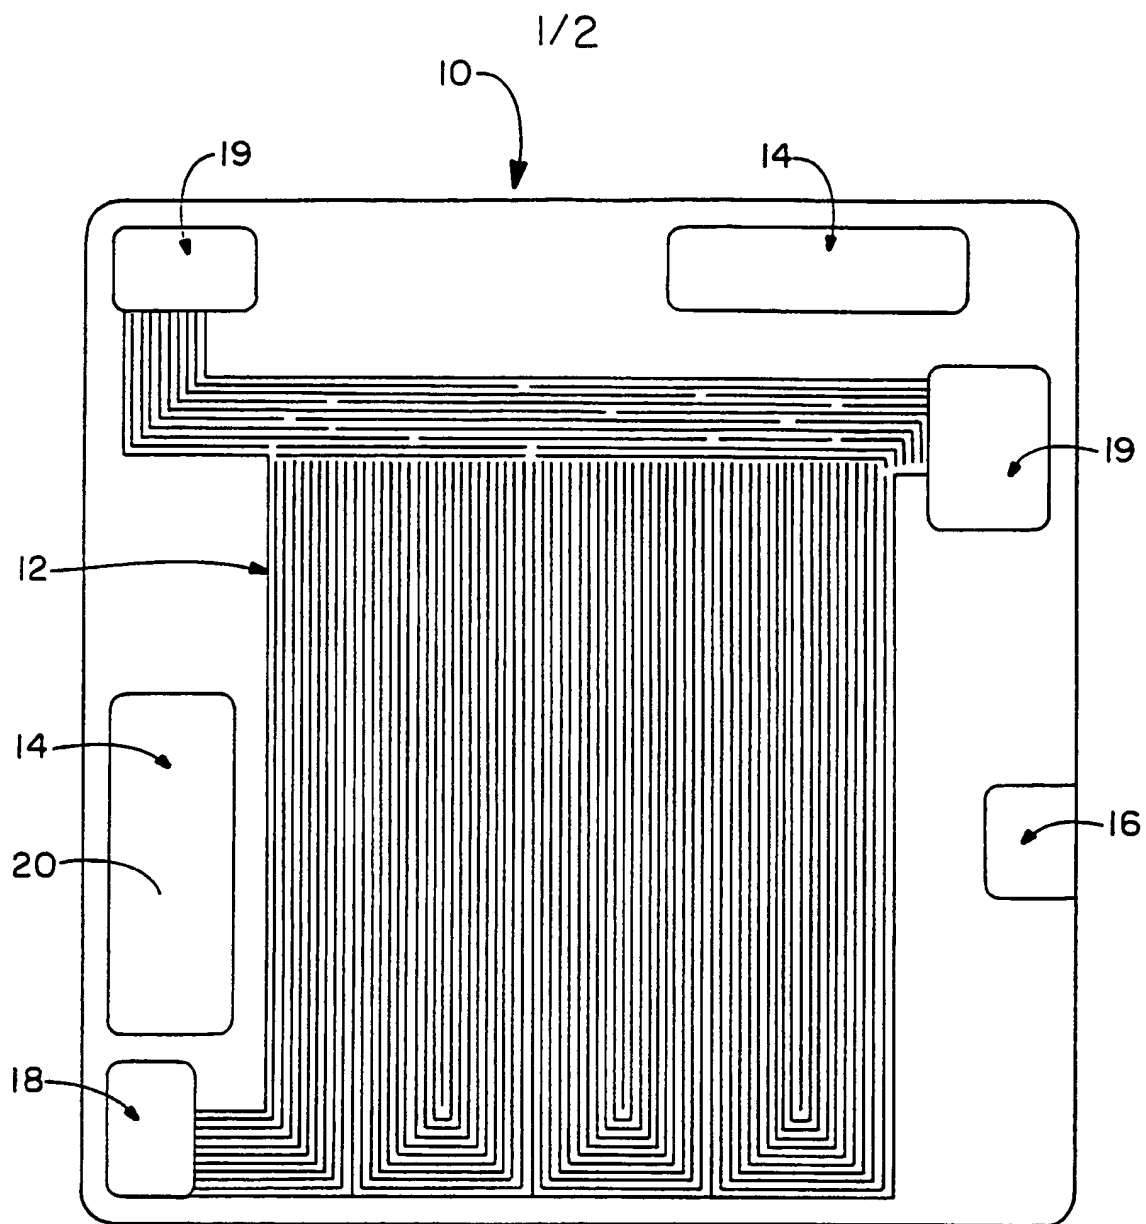


FIG.-1

2/2

FIG. - 2

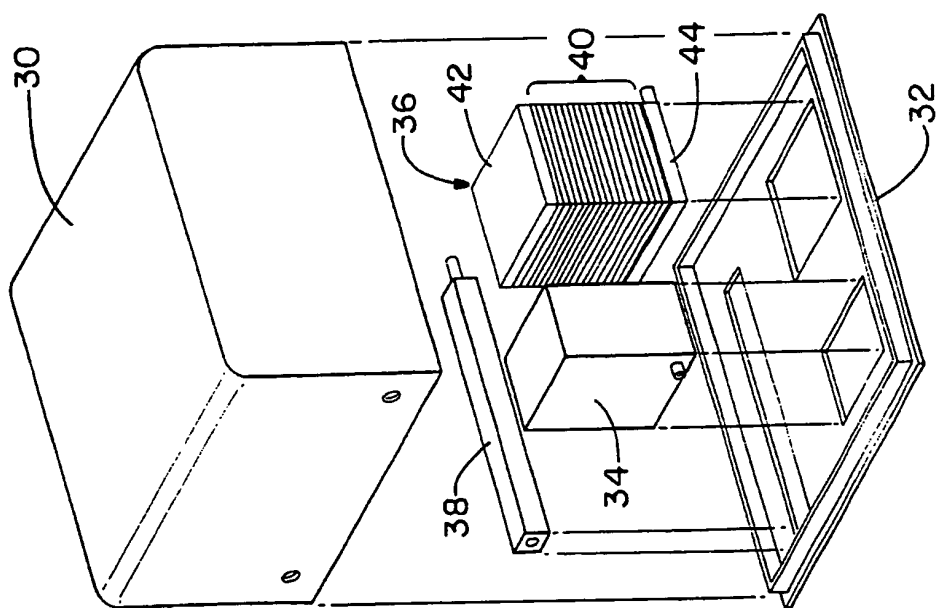

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 00/06999

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01M6/18 H01M10/40 C08F283/01 C08F290/06 C08K3/04
C08L67/06 C08L63/10

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01M C08F C08L C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 614 581 A (COBBLEDICK DAVID S ET AL) 25 March 1997 (1997-03-25) column 4, line 41-57 column 3, line 53 -column 4, line 24 ----	1-5, 10-16,33
X	US 4 908 157 A (FONTANA JACK J ET AL) 13 March 1990 (1990-03-13) column 3, line 1-20 ----	1
A	US 5 250 228 A (BAIGRIE STEPHEN ET AL) 5 October 1993 (1993-10-05) claim 1 ----	1
A	US 5 516 546 A (HARI SIEGFRIED ET AL) 14 May 1996 (1996-05-14) claim 1 -----	1



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

S* document member of the same patent family

Date of the actual completion of the international search

31 July 2000

Date of mailing of the international search report

08/08/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

MEULEMANS, R

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. l. Application No

PCT/US 00/06999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5614581 A	25-03-1997	DE 69408195 D DE 69408195 T EP 0622386 A JP 6320681 A KR 138483 B	05-03-1998 05-11-1998 02-11-1994 22-11-1994 27-04-1998
US 4908157 A	13-03-1990	NONE	
US 5250228 A	05-10-1993	US 5382384 A	17-01-1995
US 5516546 A	14-05-1996	DE 4317302 A CA 2124133 A EP 0626430 A FI 942402 A SG 49822 A	01-12-1994 26-11-1994 30-11-1994 26-11-1994 15-06-1998

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)